



US Micro Products
Electronic Products for the OEM

TFT-LCD PRODUCT SPECIFICATION

Manufactured by:



PART NUMBER:	USMP-V650DK1-LS1
DESCRIPTION:	64.5" TFT LCD with 3840 x 2160 quad full HDTV (4k2k) format, LED backlight, 4ch LVDS interface and 1.07G colors.

ISSUE DATE	APPROVED BY (Customer Use Only)	CHECKED BY	PREPARED BY
PROPRIETARY NOTE:	THIS SPECIFICATION IS THE PROPERTY OF US MICRO PRODUCTS AND SHALL NOT BE REPRODUCED OR COPIED WITHOUT THE WRITTEN PERMISSION OF US MICRO PRODUCTS AND MUST BE RETURNED TO US MICRO PRODUCTS UPON ITS REQUEST.		

- Tentative Specification
- Preliminary Specification
- Approval Specification

MODEL NO.: V650DK1

SUFFIX: LS1

CONFIDENTIAL

Customer:

APPROVED BY	SIGNATURE
Name / Title _____	_____
Note	
暗態漏光：常溫 ≤ 0.4 nit；高溫 ≤ 1 nits (條件 40°C/60%溼度/with LD)	
Please return 1 copy for your confirmation with your signature and comments.	

Approved By	Checked By	Prepared By
Chao-Chun Chung	Perry Lin	FS Tsai

CONTENTS

CONTENTS 2

REVISION HISTORY 4

GENERAL DESCRIPTION 5

 1.1 OVERVIEW 5

 1.2 FEATURES 5

 1.3 APPLICATION 5

 1.4 GENERAL SPECIFICATIONS 5

 1.5 MECHANICAL SPECIFICATIONS 7

2. ABSOLUTE MAXIMUM RATINGS 8

 2.1 ABSOLUTE RATINGS OF ENVIRONMENT 8

 2.2 PACKAGE STORAGE 9

 2.3 ELECTRICAL ABSOLUTE RATINGS 9

 2.3.1 TFT LCD MODULE 9

 2.3.2 BACKLIGHT CONVERTER UNIT 9

3. ELECTRICAL CHARACTERISTICS 10

 3.1 TFT LCD MODULE 10

 3.2 BACKLIGHT UNIT 13

4. BLOCK DIAGRAM OF INTERFACE 19

 4.1 TFT LCD MODULE 19

5. INPUT TERMINAL PIN ASSIGNMENT 20

 5.1 TFT LCD MODULE 20

 5.2 BACKLIGHT UNIT 27

 5.3 CONVERTER UNIT 28

 5.4 LVDS INTERFACE 30

 5.5 COLOR DATA INPUT ASSIGNMENT 31

6. INTERFACE TIMING 32

 6.1 INPUT SIGNAL TIMING SPECIFICATIONS (Ta = 25 ± 2 °C) 32

 6.2 POWER ON/OFF SEQUENCE 38

7. OPTICAL CHARACTERISTICS 40

CONFIDENTIAL

7.1 TEST CONDITIONS.....	40
7.2 OPTICAL SPECIFICATIONS	41
8. PRECAUTIONS.....	47
8.1 ASSEMBLY AND HANDLING PRECAUTIONS	47
8.2 SAFETY PRECAUTIONS	47
8.3 SAFETY STANDARDS	48
9. DEFINITION OF LABELS.....	49
9.1 CMI MODULE LABEL	49
10. PACKAGING.....	50
10.1 PACKAGING SPECIFICATIONS	50
10.2 PACKAGING METHOD.....	50
11. MECHANICAL CHARACTERISTIC.....	52

CONFIDENTIAL

REVISION HISTORY

Version	Date	Page (New)	Section	Description
Ver. 0.0	May. 25,2012	All	All	The tentative specification was been released.
Ver. 1.0	Aug. 07,2012	All	All	The Preliminary specification was been released.
Ver. 1.1	Sep. 04,2012	P5	1.2	Modify FEATURES
		P10	3.1	Modify TFT LCD MODULE,Note (1) (2)
		P11		Modify Note (3) (4)
		P12		Modify Note (5)
		P32	6.1	Modify INPUT SIGNAL TIMING SPECIFICATIONS (Ta = 25 ± 2 oC)
		P32	6.1.1	Modify Input Timing SPEC for FHD, Frame Rate = 100Hz
		P33	6.1.2	Modify Input Timing SPEC for FHD, Frame Rate = 120Hz
		P34	6.1.3	Modify Input Timing SPEC for QFHD, Frame Rate = 24Hz
		P35	6.1.4	Modify Input Timing SPEC for QFHD, Frame Rate = 30Hz
		P38	6.2	Modify POWER ON/OFF SEQUENCE
		P39		Modify Note (1) (2) (3) (4) (5) (6)
		P40	7.1	Modify TEST CONDITIONS
		P41	7.2	Modify Color Chromaticity
Ver. 2.0	Oct. 08,2012	All	All	The Approval specification was been released.

CONFIDENTIAL

GENERAL DESCRIPTION

1.1 OVERVIEW

USMP-V650DK1-LS1 is a 64.5" TFT Liquid Crystal Display module with LED Backlight unit and 4ch LVDS interface. This module supports 3840 x 2160 Quad Full HDTV format and can display true 1.07G colors (10-bits color). The driving board module for backlight is built-in.

1.2 FEATURES

- High brightness (400 nits)
- High contrast ratio (5000:1)
- Fast response time (Gray to Gray typical : 6.5 ms)
- High color saturation (NTSC 72%)
- Quad Full HDTV (3840 x 2160 pixels) resolution, true HDTV format
- LVDS (Low Voltage Differential Signaling) interface
- Optimized response time for 120Hz frame rate
- Viewing Angle : 176(H)/176(V) (CR>20)
- Ultra wide viewing angle: Super MVA technology
- RoHs compliance
- T-con input frame rate: FHD 100/120Hz or QFHD 24/30Hz,
output frame rate: QFHD 100/120Hz or QFHD 48Hz/60Hz

1.3 APPLICATION

- Standard Living Room TVs
- Public Display Application
- Home Theater Application
- MFM Application

1.4 GENERAL SPECIFICATIONS


Item	Specification	Unit	Note
Active Area	1428.48 (H) x 803.52 (V) (64.5" diagonal)	mm	(1)
Bezel Opening Area	1435.48(H) x 810.52(V)	mm	
Driver Element	a-si TFT active matrix	-	-
Pixel Number	3840 x R.G.B. x 2160	pixel	-
Pixel Pitch(Sub Pixel)	0.124 (H) x 0.372 (V)	mm	-
Pixel Arrangement	RGB vertical stripe	-	-
Display Colors	1.07G colors (8-bit+FRC)	color	-
Display Operation Mode	Transmissive mode / Normally black	-	-
Surface Treatment	Anti-glare type (Haze 1%) and Hardness:3H	-	(2)
Rotation Function	achievable		(3)
Display Orientation	Signal input with "CMI"		(3)

Note (1) Please refer to the attached drawings in chapter 11 for more information about the front and back outlines.

CONFIDENTIAL

Note (2) Please refer sec 3.1 and 3.2 for more information of power consumption

Note (3) The spec. of the surface treatment is temporarily for this phase. CMI reserves the rights to change this feature.

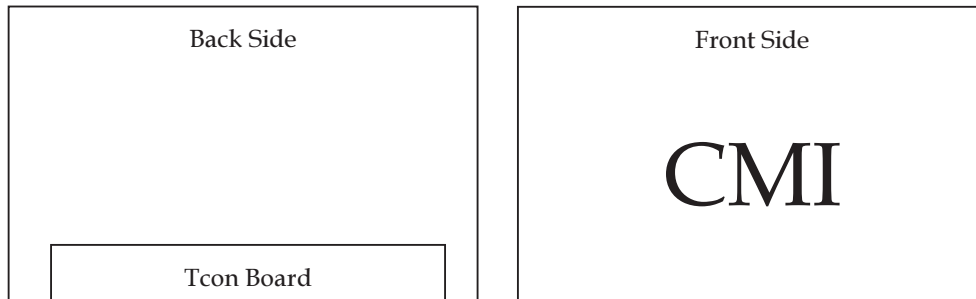

CONFIDENTIAL

1.5 MECHANICAL SPECIFICATIONS

Item		Min.	Typ.	Max.	Unit	Note
Module Size	Horizontal (H)	1448.7	1450.5	1452.3	mm	(1)
	Vertical (V)	827	828.5	830	mm	(1)
	Depth (D)	28.8	29.8	30.8	mm	(2)
	Depth (D)	16.8	17.8	18.8	mm	(3)
Weight		-	24500		-	-

Note (1) Please refer to the attached drawings for more information of front and back outline dimensions.

Note (2) Module depth is between bezel to T-CON cover.

Note (3) Module depth is between bezel to converter cover.

CONFIDENTIAL

2. ABSOLUTE MAXIMUM RATINGS

2.1 ABSOLUTE RATINGS OF ENVIRONMENT

Item	Symbol	Value		Unit	Note
		Min.	Max.		
Storage Temperature	T _{ST}	-20	+60	°C	(1)
Operating Ambient Temperature	T _{OP}	0	50	°C	(1), (2)
Shock (Non-Operating)	S _{NOP}	-	35	G	(3), (5)
Vibration (Non-Operating)	V _{NOP}	-	1.0	G	(4), (5)

Note (1) Temperature and relative humidity range is shown in the figure below.

(a) 90 %RH Max. (Ta ≤ 40 °C).

(b) Wet-bulb temperature should be 39 °C Max. (Ta > 40 °C).

(c) No condensation.


Note (2) Thermal management should be considered in final product design to prevent the surface temperature of display area from being over 65 °C. The range of operating temperature may degrade in case of improper thermal management in final product design.

Note (3) 11 ms, half sine wave, 1 time for ± X, ± Y, ± Z.

Note (4) 10 ~ 200 Hz, 30 min, 1 time each X, Y, Z.

Note (5) At testing Vibration and Shock, the fixture in holding the module has to be hard and rigid enough so that the module would not be twisted or bent by the fixture.

CONFIDENTIAL

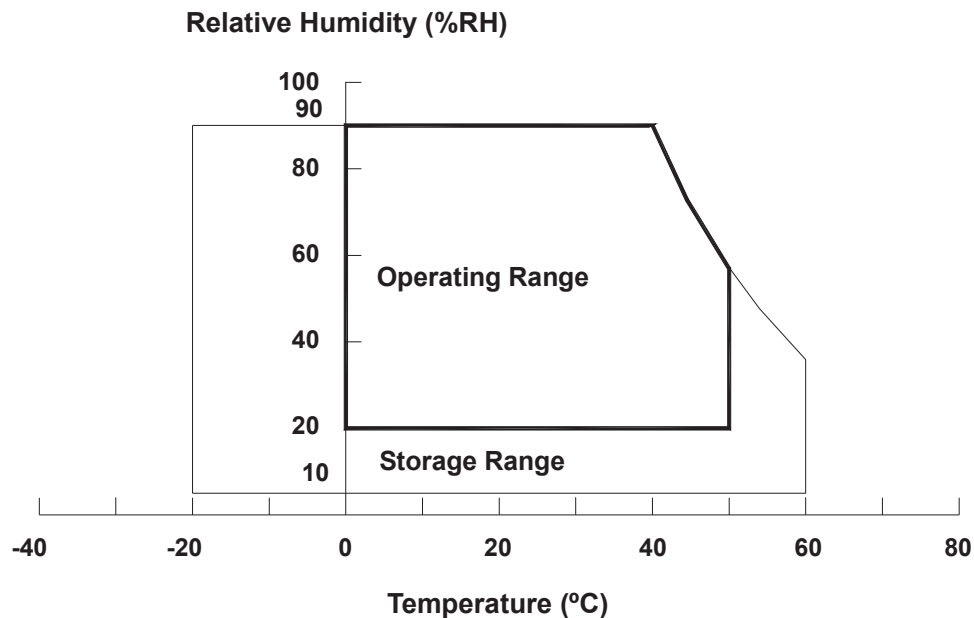

2.2 PACKAGE STORAGE

When storing modules as spares for a long time, the following precaution is necessary.

- (a) Do not leave the module in high temperature, and high humidity for a long time, It is highly recommended to store the module with temperature from 0 to 35 °C at normal humidity without condensation.
- (b) The module shall be stored in dark place. Do not store the TFT-LCD module in direct sunlight or fluorescent light.

2.3 ELECTRICAL ABSOLUTE RATINGS

2.3.1 TFT LCD MODULE

Item	Symbol	Value		Unit	Note
		Min.	Max.		
Power Supply Voltage	V _{CC}	-0.3	13.5	V	(1)
Logic Input Voltage	V _N	-0.3	3.6	V	

2.3.2 BACKLIGHT CONVERTER UNIT

Item	Symbol	Test Condition	Min.	Type	Max.	Unit	Note
Light Bar Voltage	V _W	Ta = 25 °C	-	-	60	V _{RMS}	3D Mode
Converter Input Voltage	V _{BL}	-	0	-	30	V	
Control Signal Level	-	-	-0.3	-	6	V	

Note (1) Permanent damage to the device may occur if maximum values are exceeded. Function operation should be restricted to the conditions described under Normal Operating Conditions.

Note (2) No moisture condensation or freezing.

Note (3) The control signals include On/Off Control and External PWM Control.

CONFIDENTIAL

3. ELECTRICAL CHARACTERISTICS

3.1 TFT LCD MODULE

(Ta = 25 ± 2 °C)


Parameter	Symbol	Value			Unit	Note	
		Min.	Typ.	Max.			
Power Supply Voltage	V _{CC}	10.8	12	13.2	V	(1)	
Rush Current	I _{RUSH}	—	—	4.76	A	(2)	
OFHD 120Hz Output Power Consumption	White Pattern	P _T	—	12.48	14.76	W	(3)
	Horizontal Stripe	P _T	—	30.6	36.6	W	
	Black Pattern	P _T	—	12.72	14.88	W	
OFHD 120Hz Output Power Supply Current	White Pattern	—	—	1.04	1.23	A	
	Horizontal Stripe	—	—	2.55	3.05	A	
	Black Pattern	—	—	1.06	1.24	A	
QFHD 60Hz Output Power Consumption	White Pattern	P _T	—	10.8	12.84	W	
	Horizontal Stripe	P _T	—	23.04	34.56	W	
	Black Pattern	P _T	—	10.92	13.2	W	
QFHD 60Hz Output Power Supply Current	White Pattern	—	—	0.9	1.07	A	
	Horizontal Stripe	—	—	1.92	2.88	A	
	Black Pattern	—	—	0.91	1.1	A	
LVDS interface	Differential Input High Threshold Voltage	V _{LVTH}	+100	—	+300	mV	(4)
	Differential Input Low Threshold Voltage	V _{LVTL}	-300	—	-100	mV	
	Common Input Voltage	V _{CM}	1.0	1.2	1.4	V	
	Differential input voltage (single-end)	V _{ID}	200	—	600	mV	
	Terminating Resistor	R _T	—	100	—	ohm	
CMOS interface	Input High Threshold Voltage	V _{IH}	2.7	—	3.3	V	
	Input Low Threshold Voltage	V _{IL}	0	—	0.7	V	

Note (1) The module should be always operated within the above ranges.

Note (2) The ripple voltage should be controlled under 10% of Vcc (Typ.):

CONFIDENTIAL

Note (3) Measurement Condition:

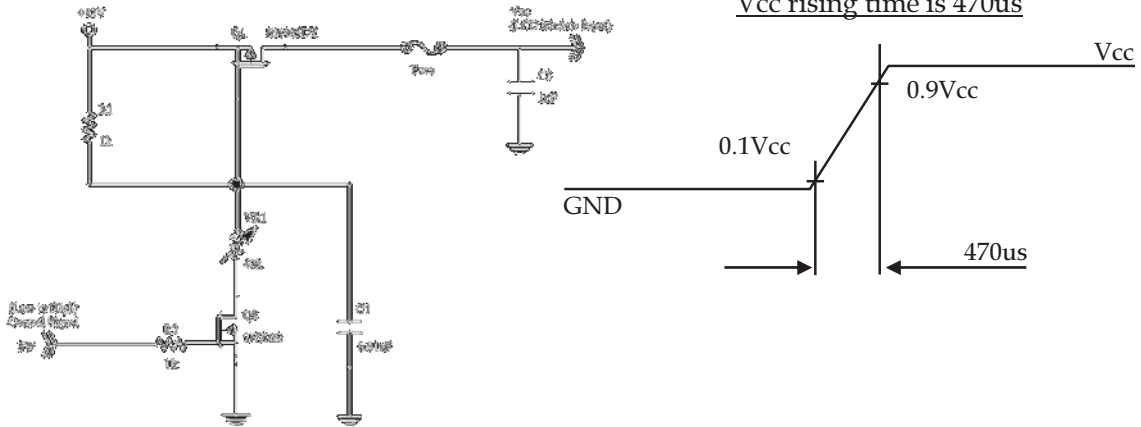


Note (4) The specified power supply current is under the conditions at $V_{cc} = 12\text{ V}$, $T_a = 25 \pm 2\text{ }^\circ\text{C}$, $f_v = 60/120\text{ Hz}$ whereas a power dissipation check pattern below is displayed.

a. White Pattern





Active Area

b. Black Pattern




Active Area

c. Horizontal Pattern

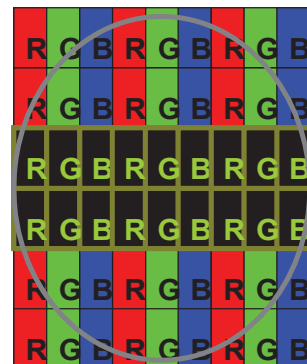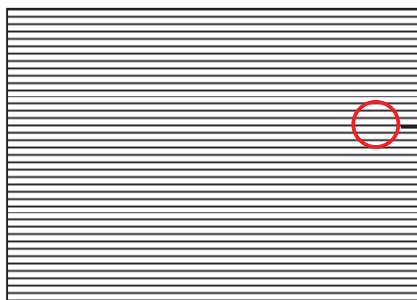

CONFIDENTIAL

Note (5) The LVDS input characteristics are as follows :

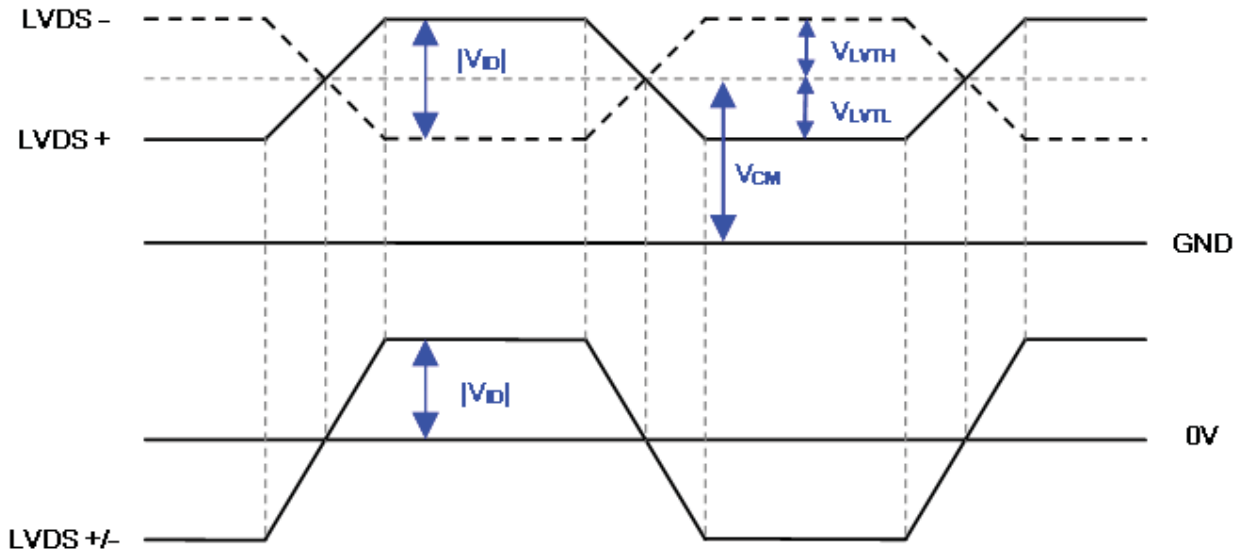

CONFIDENTIAL

3.2 BACKLIGHT UNIT

3.2.1 LED LIGHT BAR CHARACTERISTICS

The backlight unit contains 4 pcs LED light bar, and each light bar has 32 string LED

Parameter	Symbol	Value			Unit	Note
		Min.	Typ.	Max.		
One String Current	$I_{L(2D)}$	112.8	120	127.2	mA	(1)
	$I_{L(3D)}$	-	450	-	mApeak	3D ENA=ON
One String Voltage	V_W	33.78	-	38.76	V_{DC}	$I_L = 120mA$
One String Voltage Variation	ΔV_W	-	-	2	V	
Life time	-	30,000	-	-	Hrs	(2)

Note (1) Dimming Ratio=100%

Note (2) The lifetime is defined as the time which luminance of the LED decays to 50% compared to the initial value, Operating condition: Continuous operating at $T_a = 25 \pm 2^\circ C$, $I_L = 120mA$

3.2.2 CONVERTER CHARACTERISTICS ($T_a = 25 \pm 2^\circ C$)

Parameter	Symbol	Value			Unit	Note
		Min.	Typ.	Max.		
Power Consumption	$P_{BL(2D)}$	-	155.9	172.29	W	(1), (2) $I_L = 120 mA$
	$P_{BL(3D)}$	-	145.54	177.88	W	(1), (2) $I_L = 450mA_{peak}$.
Converter Input Voltage	V_{BL}	22.8	24.0	25.2	VDC	
Converter Input Current	$I_{BL(2D)}$	-	6.5	7.18	A	Non Dimming
	$I_{BL(3D)}$	-	6.07	7.41	A	
Input Inrush Current	$I_{R(2D)}$	-	-	10.11	Apeak	$V_{BL} = 22.8V, (I_L = typ.)$ (3), (6)
	$I_{R(3D)}$	-	-	16.78	Apeak	$V_{BL} = 22.8V, (I_L = 450m$ $A_{peak})$ (3), (6)
Dimming Frequency	FB	170	180	190	Hz	(5)
Minimum Duty Ratio	DMIN	5	-	100	%	(4), (5)

Note (1) The power supply capacity should be higher than the total converter power consumption P_{BL} . Since the pulse width modulation (PWM) mode was applied for backlight dimming, the driving current changed as PWM duty on and off. The transient response of power supply should be considered for the changing loading when converter dimming.

Note (2) The measurement condition of Max. value is based on 65" backlight unit under input voltage 24V, average LED current 127.2 mA at 2D Mode (LED current 477 mA_{peak} at 3D Mode) and lighting 1 hour later.


Note (3) For input inrush current measure, the VBL rising time from 10% to 90% is about 30ms.

Note (4) EPWM signal have to input available duty range. Between 97% and 100% duty (DDR) have to be avoided. (97% < DDR < 100%) But 100% duty(DDR) is possible. 5% duty (DDR) is only valid for electrical operation.

Note (5) FB and DDR are available only at 2D Mode.

Note (6) Below diagram is only for power supply design reference.

Test Condition: VBL=22.8V, IL=120mA at 2D Mode / IL=(450)mApeak at 3D Mode.

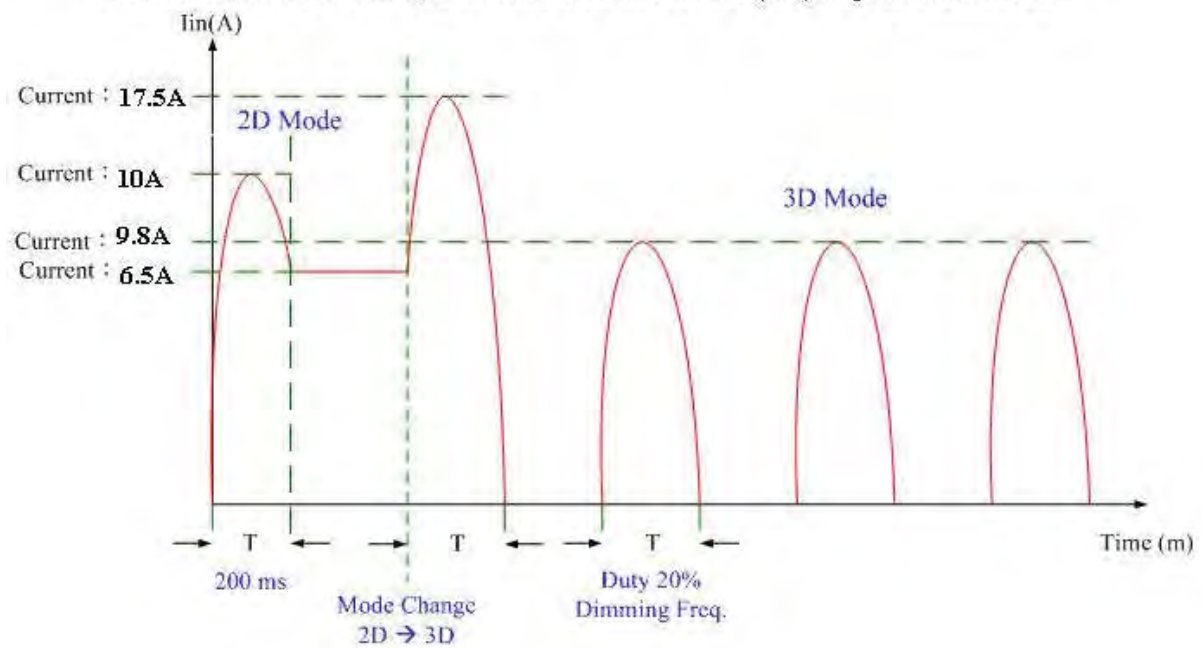

CONFIDENTIAL

3.2.3 CONVERTER INTERFACE CHARACTERISTICS

Parameter	Symbol	Test Condition	Value			Unit	Note		
			Min.	Typ.	Max.				
On/Off Control Voltage	ON	VBLON	—	2.0	—	5.0	V		
	OFF		—	0	—	0.8	V		
External PWM Control Voltage	HI	VEPWM	—	2.0	—	5.25	V	Duty on	(5), (6)
	LO		—	0	—	0.8	V	Duty off	
External PWM Frequency	F_{EPWM}	—	150	160	170	Hz	Normal mode (7)		
Error Signal	ERR	—	—	—	—	—	Abnormal: Open collector Normal: GND (4)		
VBL Rising Time	Tr1	—	20	—	—	ms	10%-90%V _{BL}		
Control Signal Rising Time	Tr	—	—	—	100	ms			
Control Signal Falling Time	Tf	—	—	—	100	ms			
PWM Signal Rising Time	TPWMR	—	—	—	50	us	(6)		
PWM Signal Falling Time	TPWMF	—	—	—	50	us			
Input Impedance	Rin	—	1	—	—	MΩ	EPWM, BLON		
PWM Delay Time	TPWM	—	100	—	—	ms	(6)		
BLON Delay Time	T _{on}	—	300	—	—	ms			
	T _{on1}	—	300	—	—	ms			
BLON Off Time	Toff	—	300	—	—	ms			

Note (1) The dimming signal should be valid before backlight turns on by BLON signal. It is inhibited to change the external PWM signal during backlight turn on period.

Note (2) The power sequence and control signal timing are shown in the Fig.1. For a certain reason, the converter has a possibility to be damaged with wrong power sequence and control signal timing.

Note (3) While system is turned ON or OFF, the power sequences must follow as below descriptions:

Turn ON sequence: V_{BL} → PWM signal → BLON

Turn OFF sequence: BLOFF → PWM signal → V_{BL}

Note (4) When converter protective function is triggered, ERR will output open collector status. Please refers to Fig.2.

Note (5) The EPWM interface that inserts a pull up resistor to 5V in max duty (100%), please refers to Fig.3.

CONFIDENTIAL

Note (6) EPWM is available only at 2D Mode.

Note (7) EPWM signal have to input available frequency range.

Note (8): [Recommend] EPWM duty ratio is set at 100%(Max. Brightness) in 3D Mode

CONFIDENTIAL

CONFIDENTIAL

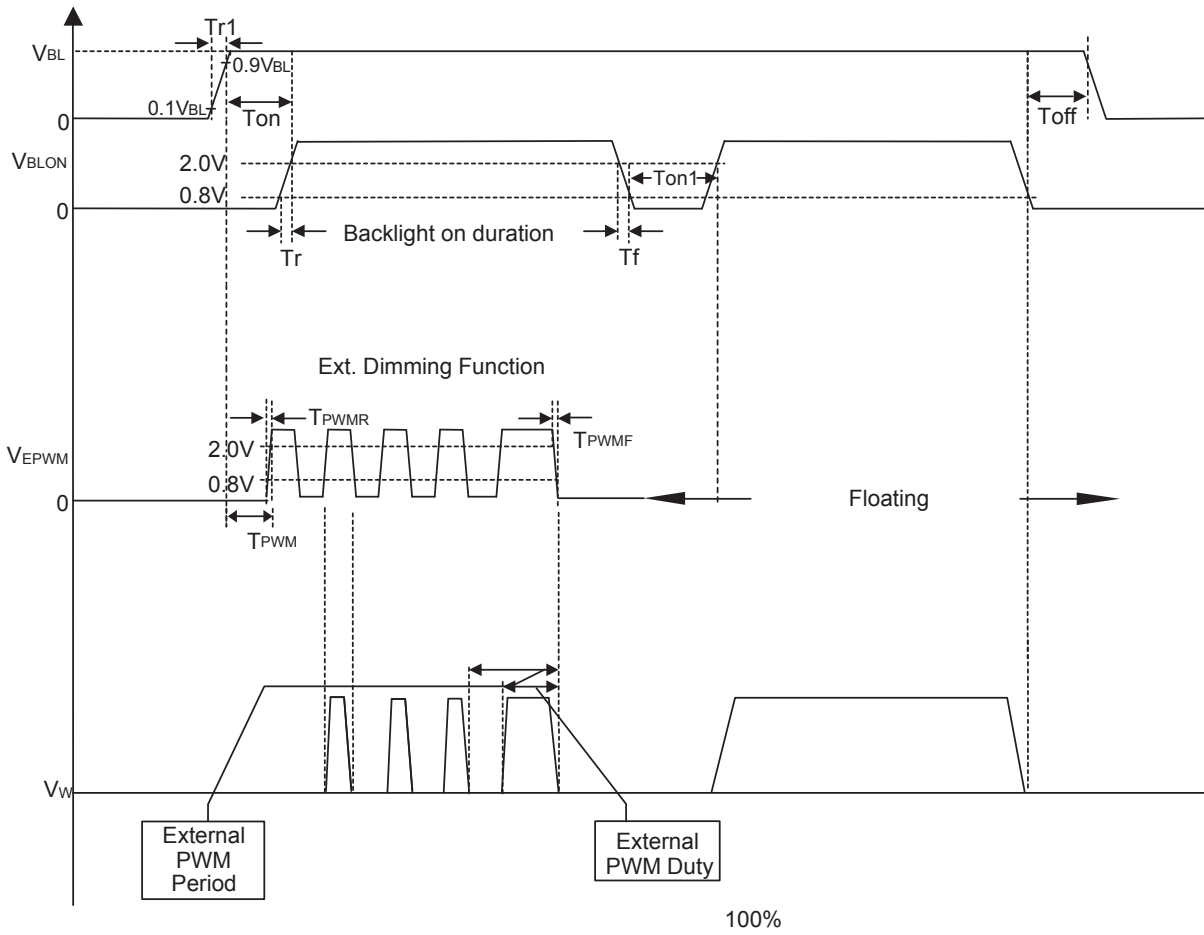


Fig. 1

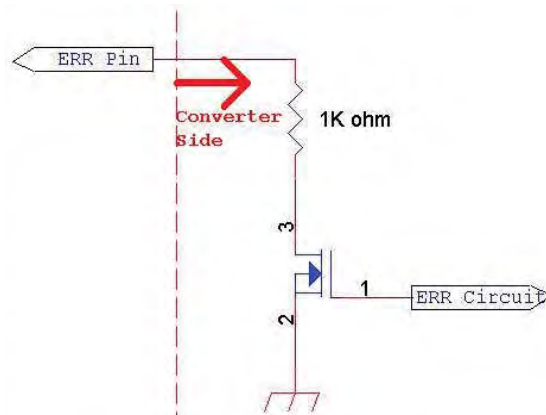


Fig. 2


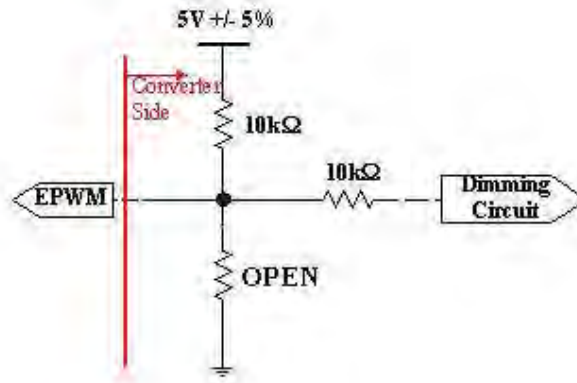


Fig. 3

CONFIDENTIAL

4. BLOCK DIAGRAM OF INTERFACE

4.1 TFT LCD MODULE

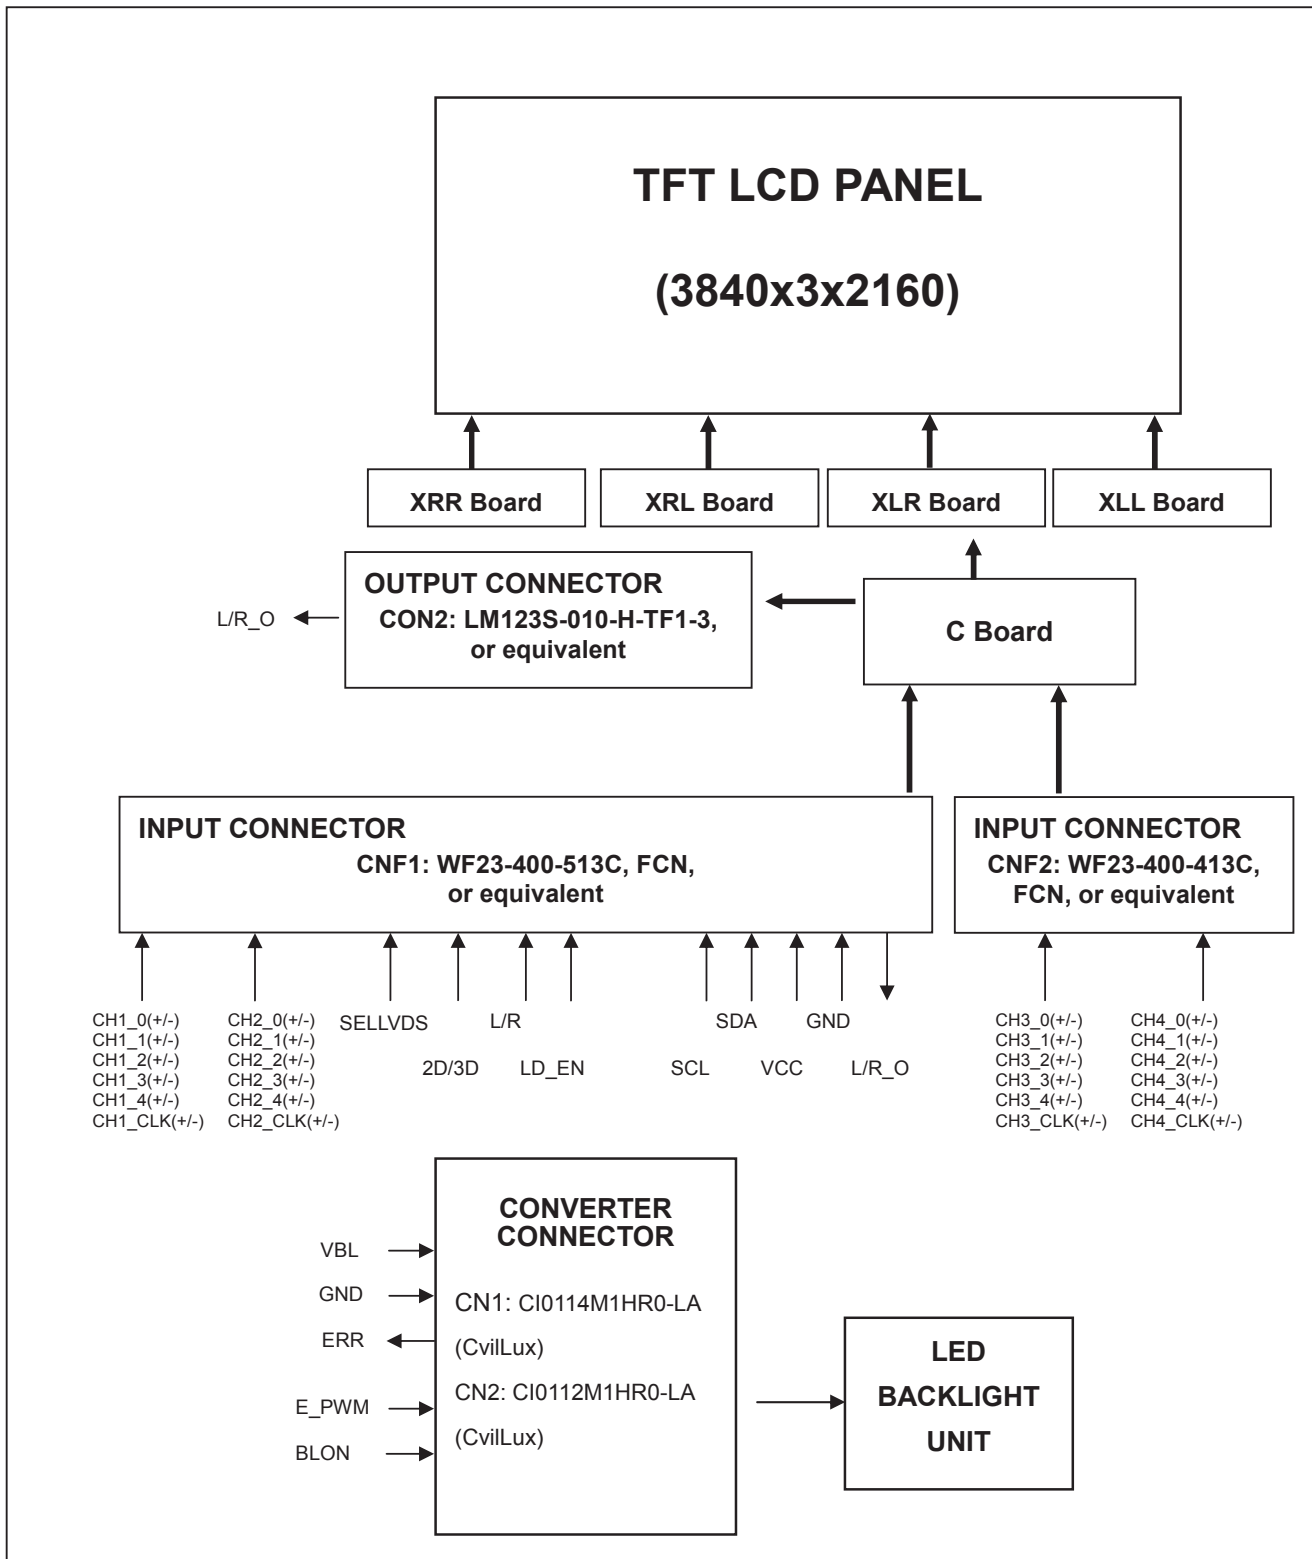

CONFIDENTIAL

5 .INPUT TERMINAL PIN ASSIGNMENT

5.1 TFT LCD MODULE

CNF1 Connector pin assignment: (WF23-400-513C (FCN) or equivalent)

Pin	Name	Description	Note
1	N.C.	No Connection	(1)
2	SCL	I2C Clock (for mode selection & function setting)	
3	SDA	I2C Data (for mode selection & function setting)	
4	N.C.	No Connection	(1)
5	L/R_O	Output signal for Left Right Glasses control	(2)
6	N.C.	No Connection	(1)
7	SELLVDS	Input signal for LVDS Data Format Selection	(3)(9)
8	N.C.	No Connection	(1)
9	N.C.	No Connection	
10	N.C.	No Connection	
11	GND	Ground	
12	CH1[0]-	First pixel Negative LVDS differential data input. Pair 0	(4)
13	CH1[0]+	First pixel Positive LVDS differential data input. Pair 0	
14	CH1[1]-	First pixel Negative LVDS differential data input. Pair 1	
15	CH1[1]+	First pixel Positive LVDS differential data input. Pair 1	
16	CH1[2]-	First pixel Negative LVDS differential data input. Pair 2	
17	CH1[2]+	First pixel Positive LVDS differential data input. Pair 2	
18	GND	Ground	
19	CH1CLK-	First pixel Negative LVDS differential clock input.	(4)
20	CH1CLK+	First pixel Positive LVDS differential clock input.	
21	GND	Ground	
22	CH1[3]-	First pixel Negative LVDS differential data input. Pair 3	(4)
23	CH1[3]+	First pixel Positive LVDS differential data input. Pair 3	
24	CH1[4]-	First pixel Negative LVDS differential data input. Pair 4	
25	CH1[4]+	First pixel Positive LVDS differential data input. Pair 4	
26	2D/3D	Input signal for 2D/3D Mode Selection	(5)(10)
27	L/R	Input signal for Left Right eye frame synchronous	(6)
28	CH2[0]-	Second pixel Negative LVDS differential data input. Pair 0	(4)

CONFIDENTIAL

29	CH2[0]+	Second pixel Positive LVDS differential data input. Pair 0	
30	CH2[1]-	Second pixel Negative LVDS differential data input. Pair 1	
31	CH2[1]+	Second pixel Positive LVDS differential data input. Pair 1	
32	CH2[2]-	Second pixel Negative LVDS differential data input. Pair 2	
33	CH2[2]+	Second pixel Positive LVDS differential data input. Pair 2	
34	GND	Ground	
35	CH2CLK-	Second pixel Negative LVDS differential clock input.	(4)
36	CH2CLK+	Second pixel Positive LVDS differential clock input.	
37	GND	Ground	
38	CH2[3]-	Second pixel Negative LVDS differential data input. Pair 3	(4)
39	CH2[3]+	Second pixel Positive LVDS differential data input. Pair 3	
40	CH2[4]-	Second pixel Negative LVDS differential data input. Pair 4	
41	CH2[4]+	Second pixel Positive LVDS differential data input. Pair 4	
42	LD_EN	Input signal for Local Dimming Enable	(7)(9)
43	N.C.	No Connection	(8)
44	GND	Ground	
45	GND	Ground	
46	GND	Ground	
47	N.C.	No Connection	(1)
48	VCC	+12V power supply	
49	VCC	+12V power supply	
50	VCC	+12V power supply	
51	VCC	+12V power supply	

CONFIDENTIAL

CNF2 Connector pin assignment (WF23-400-413C (FCN) or equivalent)

Pin	Name	Description	Note
1	N.C.	No Connection	(1)
2	N.C.	No Connection	
3	N.C.	No Connection	
4	N.C.	No Connection	
5	N.C.	No Connection	
6	N.C.	No Connection	
7	N.C.	No Connection	
8	N.C.	No Connection	
9	GND	Ground	
10	CH3[0]-	Third pixel Negative LVDS differential data input. Pair 0	(4)
11	CH3[0]+	Third pixel Positive LVDS differential data input. Pair 0	
12	CH3[1]-	Third pixel Negative LVDS differential data input. Pair 1	
13	CH3[1]+	Third pixel Positive LVDS differential data input. Pair 1	
14	CH3[2]-	Third pixel Negative LVDS differential data input. Pair 2	
15	CH3[2]+	Third pixel Positive LVDS differential data input. Pair 2	
16	GND	Ground	
17	CH3CLK-	Third pixel Negative LVDS differential clock input.	(4)
18	CH3CLK+	Third pixel Positive LVDS differential clock input.	
19	GND	Ground	
20	CH3[3]-	Third pixel Negative LVDS differential data input. Pair 3	(4)
21	CH3[3]+	Third pixel Positive LVDS differential data input. Pair 3	
22	CH3[4]-	Third pixel Negative LVDS differential data input. Pair 4	
23	CH3[4]+	Third pixel Positive LVDS differential data input. Pair 4	
24	GND	Ground	
25	GND	Ground	
26	CH4[0]-	Fourth pixel Negative LVDS differential data input. Pair 0	(4)
27	CH4[0]+	Fourth pixel Positive LVDS differential data input. Pair 0	
28	CH4[1]-	Fourth pixel Negative LVDS differential data input. Pair 1	
29	CH4[1]+	Fourth pixel Positive LVDS differential data input. Pair 1	
30	CH4[2]-	Fourth pixel Negative LVDS differential data input. Pair 2	

CONFIDENTIAL

31	CH4[2]+	Fourth pixel Positive LVDS differential data input. Pair 2	
32	GND	Ground	
33	CH4CLK-	Fourth pixel Negative LVDS differential clock input.	(4)
34	CH4CLK+	Fourth pixel Positive LVDS differential clock input.	
35	GND	Ground	
36	CH4[3]-	Fourth pixel Negative LVDS differential data input. Pair 3	(4)
37	CH4[3]+	Fourth pixel Positive LVDS differential data input. Pair 3	
38	CH4[4]-	Fourth pixel Negative LVDS differential data input. Pair 4	
39	CH4[4]+	Fourth pixel Positive LVDS differential data input. Pair 4	
40	GND	Ground	
41	GND	Ground	

CON2 Connector Pin Assignment LM123S010HTF13Y

1	N.C.	No Connection	(1)
2	N.C.	No Connection	
3	N.C.	No Connection	
4	GND	Ground	
5	N.C.	No Connection	(1)
6	L/R_O	Output signal for Left Right Glasses control	(2)
7	N.C.	No Connection	(1)
8	N.C.	No Connection	
9	N.C.	No Connection	
10	N.C.	No Connection	

Note (1) Reserved for internal use. Please leave it open.

Note (2) The definition of L/R_O signal as follows

L= 0V , H= +3.3V

L/R_O	Note
L	Right glass turn on
H	Left glass turn on

Note (3) LVDS format selection.

L= Connect to GND, H=Connect to +3.3V or Open

SELLVDS	Note
L	JEIDA Format
H or Open	VESA Format

CONFIDENTIAL

Note (4) LVDS 4-port Data Mapping

FHD 100/120Hz Input

Port	Channel of LVDS	Data Stream
1st Port	First Pixel	1, 5, 9, 1913, 1917
2nd Port	Second Pixel	2, 6, 10, 1914, 1918
3rd Port	Third Pixel	3, 7, 11, 1915, 1919
4th Port	Fourth Pixel	4, 8, 12, 1916, 1920

QFHD 24/30 Input

Port	Channel of LVDS	Data Stream
1st Port	First Pixel	1, 5, 9, 3833, 3837
2nd Port	Second Pixel	2, 6, 10, 3834, 3838
3rd Port	Third Pixel	3, 7, 11, 3835, 3839
4th Port	Fourth Pixel	4, 8, 12, 3836, 3840

Note (5) 2D/3D mode selection.


L= Connect to GND or Open, H=Connect to +3.3V

2D/3D	Note
L or Open	2D Mode
H	3D Mode

Note (6) Input signal for left and right eye frame synchronous

$V_{IL}=0\sim 0.7\text{ V}$, $V_{IH}=2.7\sim 3.3\text{ V}$

L/R	Note
L	Right synchronous signal
H	Left synchronous signal

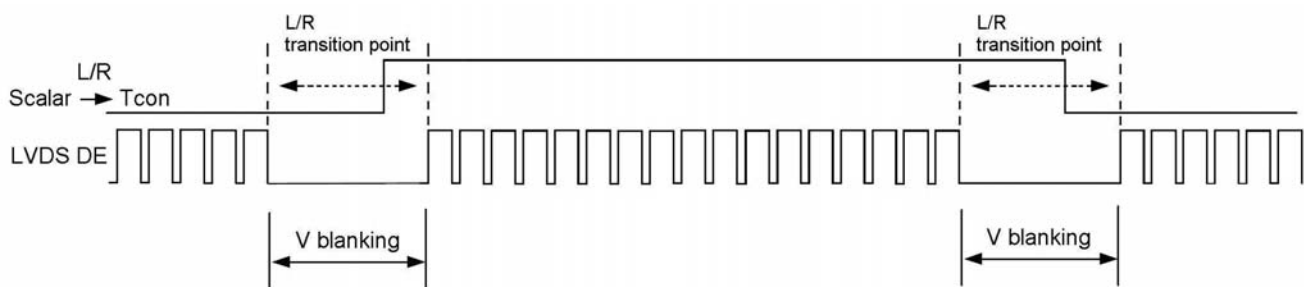

Note (7) Local dimming enable selection.


L= Connect to GND, H=Connect to +3.3V or Open

LD_EN	Note
L	Local Dimming Disable
H or Open	Local Dimming Enable


CONFIDENTIAL

Note (8) Reserved for internal use. Open is preferred. However, it is also acceptable to reserve the wire connecting with specific High/Low voltage level.

Note (9) Interface optional pin has internal scheme as following diagram. Customer should keep the interface voltage level requirement which including panel board loading as below.

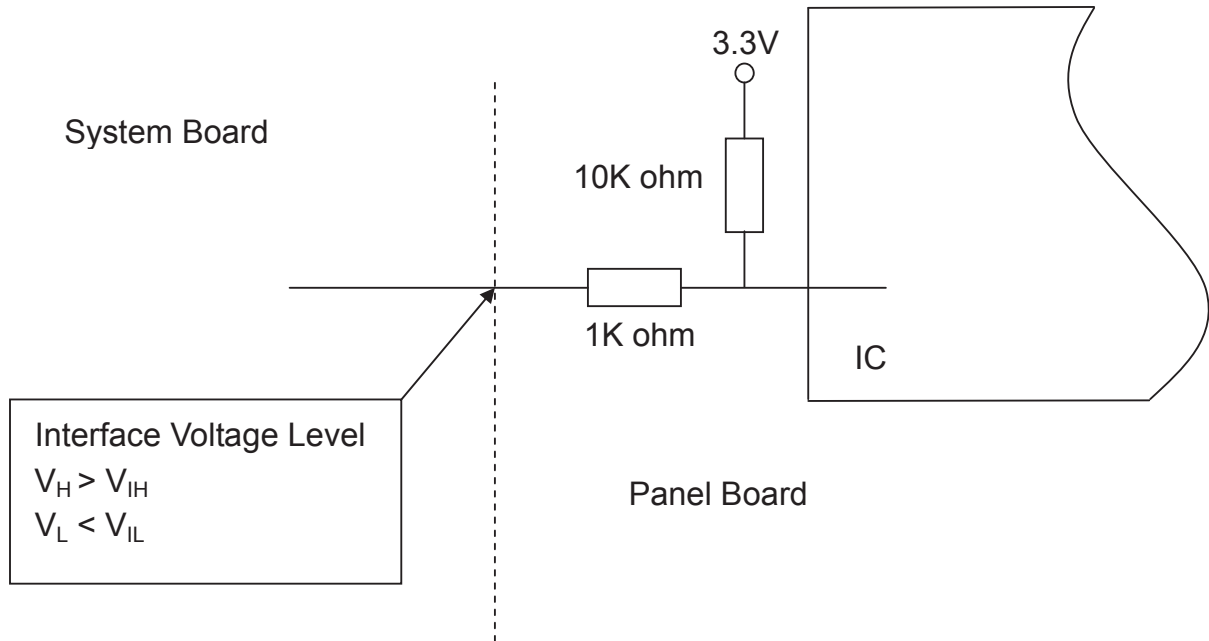


Note (10) Interface optional pin has internal scheme as following diagram. Customer should keep the interface voltage level requirement which including panel board loading as below.

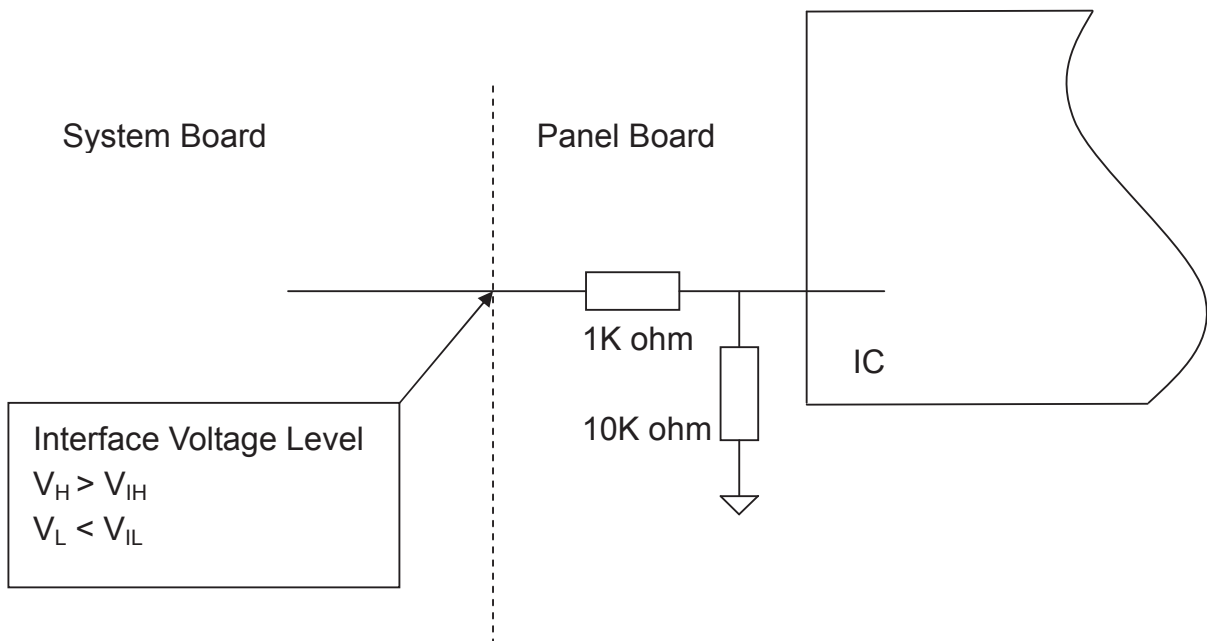


CONFIDENTIAL

Note (11) LVDS connector pin order defined as follows

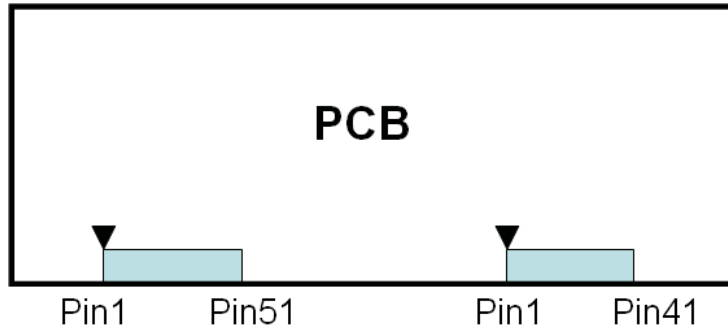

LVDS Connector

Note (12) LVDS connector mating dimension range request is 0.93mm~1.0mm as follow

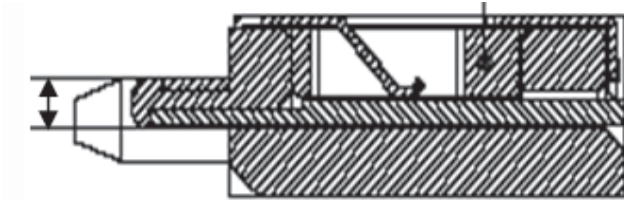

CONFIDENTIAL

5.2 BACKLIGHT UNIT

The pin configuration for the housing and leader wire is shown in the table below.

CN3 & CN6 : P-TWO 196388-12041-3

Pin No	Symbol	Feature
1	VLED-	Negative of LED String
2		
3		
4		
5		
6		
7		
8		
9	NC	No Connection
10	VLED+	Positive of LED String
11		
12		

CN4 & CN5 : P-TWO 196388-12041-3

Pin No	Symbol	Feature
1	VLED+	Positive of LED String
2		
3		
4	NC	No Connection
5	VLED-	Negative of LED String
6		
7		
8		
9		
10		
11		
12		

CONFIDENTIAL

5.3 CONVERTER UNIT

CN1: CI0114M1HR0-LA (CvilLux)

Pin №	Symbol	Feature
1	VBL	+24V
2		
3		
4		
5		
6	GND	GND
7		
8		
9		
10		
11	ERR	Normal : GND Abnormal : Open Collector
12	BLON	BL ON/OFF ON: Hi(2 ~ 5V) OFF: 0~0.8V/ GND
13	NC	NC
14	E_PWM	External PWM Control 5%~100% duty (Open for 100%)

CONFIDENTIAL


Note (1) If Pin14 is open, E_PWM is 100% duty.

Note (2) Input connector pin order defined as follows

CN2 : CI0112M1HR0-LA (CvilLux)

Pin №	Symbol	Feature
1	VBL	+24V
2		
3		
4		
5		
6	GND	GND
7		
8		
9		
10		
11	NC	NC
12	NC	NC


CONFIDENTIAL

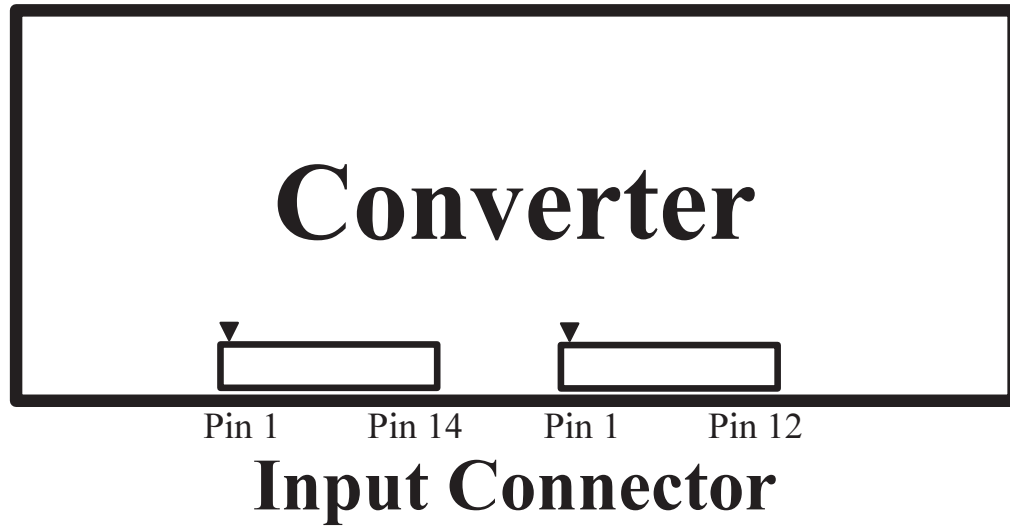

5.4 LVDS INTERFACE

JEIDA Format : SELLVDS = L

VESA Format : SELLVDS = H or Open

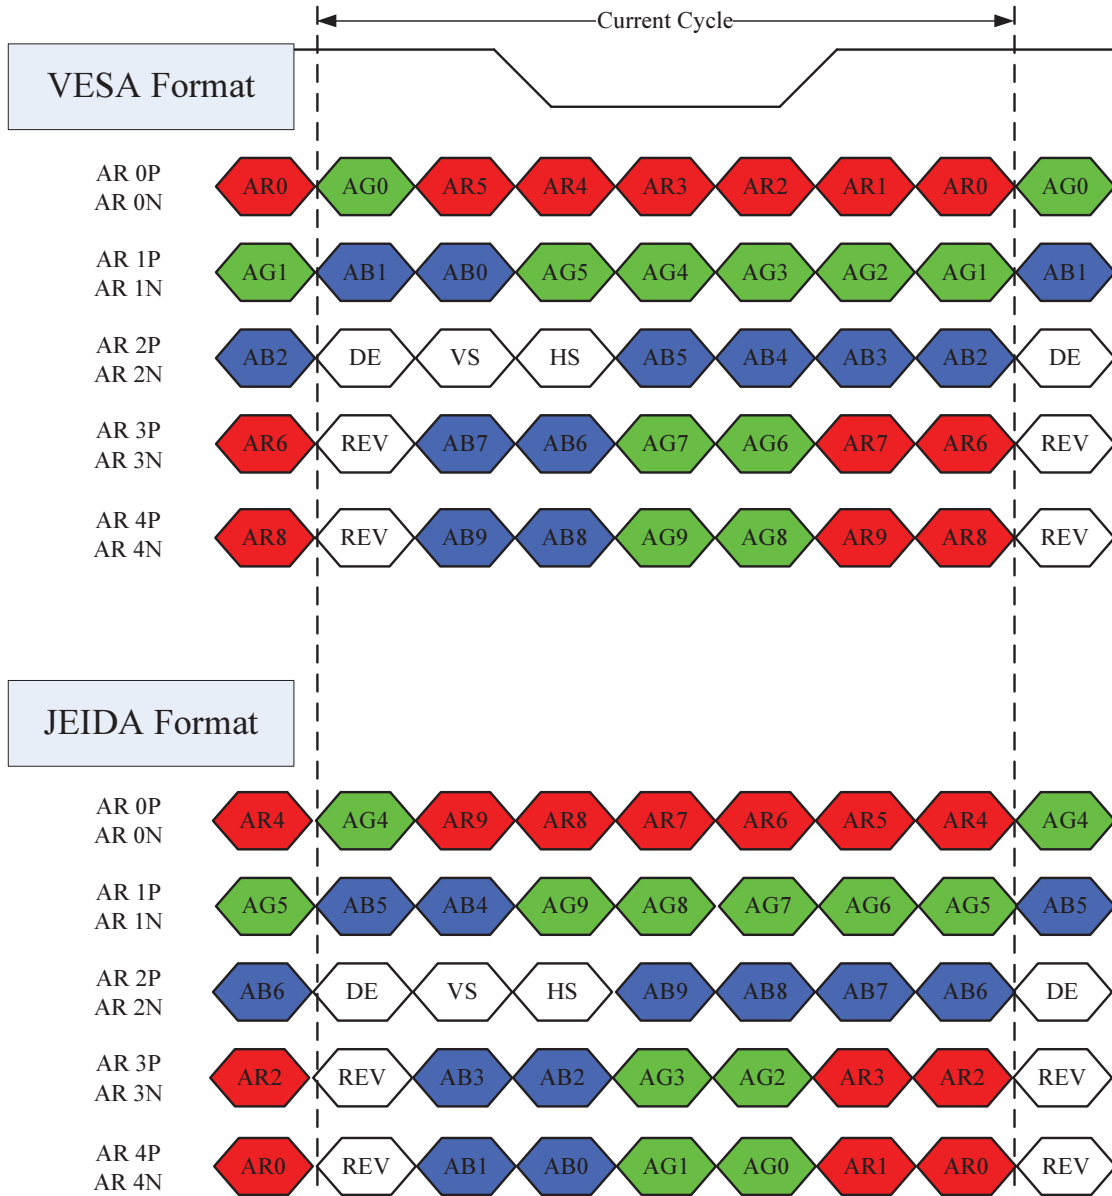

R0~R9: Pixel R Data (9; MSB, 0; LSB)

G0~G9: Pixel G Data (9; MSB, 0; LSB)

B0~B9: Pixel B Data (9; MSB, 0; LSB)

DE : Data enable signal

DCLK : Data clock signal

Notes: (1) RSVD (reserved) pins on the transmitter shall be "H" or "L".

CONFIDENTIAL

5.5 COLOR DATA INPUT ASSIGNMENT

The brightness of each primary color (red, green and blue) is based on the 10-bit gray scale data input for the color. The higher the binary input the brighter the color. The table below provides the assignment of color versus data input.

Color		Data Signal																																						
		Red										Green										Blue																		
		R9	R8	R7	R6	R5	R4	R3	R2	R1	R0	G9	G8	G7	G6	G5	G4	G3	G2	G1	G0	B9	B8	B7	B6	B5	B4	B3	B2	B1	B0									
Basic Colors	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Red	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Green	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Blue	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1
	Cyan	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0
	Magenta	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1
	Yellow	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0
	White	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Gray Scale Of Red	Red (0) / Dark	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
	Red (1)	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
	Red (2)	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮		
	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮		
	Red (1021)	1	1	1	1	1	1	1	1	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
	Red (1022)	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
	Red (1023)	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
Gray Scale Of Green	Green (0) / Dark	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
	Green (1)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
	Green (2)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮		
	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮		
	Green (1021)	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
	Green (1022)	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
	Green (1023)	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
Gray Scale Of Blue	Blue (0) / Dark	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
	Blue (1)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	
	Blue (2)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	
	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮		
	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮		
	Blue (1021)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	0	1	1	
	Blue (1022)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	0	
	Blue (1023)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	

Note (1) 0: Low Level Voltage · 1: High Level Voltage

CONFIDENTIAL

6. INTERFACE TIMING

6.1 INPUT SIGNAL TIMING SPECIFICATIONS (Ta = 25 ± 2 °C)

The input signal timing specifications are shown as the following table and timing diagram. (Ta = 25 ± 2 °C)

Signal	Item	Symbol	Min.	Typ.	Max.	Unit	Note
LVDS Receiver Clock	Input cycle to cycle jitter	T_{rcI}	-	-	200	ps	(1)
	Spread spectrum modulation range	F_{clkIn_mod}	$F_{clkIn}-1.5\%$	-	$F_{clkIn}+1.5\%$	MHz	(2)
	Spread spectrum modulation frequency	F_{SSM}	-	-	66	KHz	
LVDS Receiver Data	Receiver skew margin	T_{RSKM}	-400	-	400	ps	(3)

6.1.1 Input Timing SPEC for FHD, Frame Rate = 100Hz

Signal	Item	Symbol	Min.	Typ.	Max.	Unit	Note	
LVDS Clock	Frequency	F_{clkIn} (=1/TC)	60	74.25	79	MHz	(4)	
Frame Rate	2D Mode	F_r	97	100	103	Hz	(5)	
Vertical Active Display Term	2D Mode	Total	T_v	1104	1350	1395	Th	$T_v=T_{vd}+T_{vb}$
		Display	T_{vd}	1080			Th	
		Blank	T_{vb}	24	270	315	Th	
		Front porch	T_{vfp}	10	-	-	Th	(6)
		Back porch	T_{vbp}	10	-	-	Th	
		Vsync	T_{vswid}	4	-	-	Th	
Horizontal Active Display Term	2D Mode	Total	T_h	530	550	670	Tc	$T_h=T_{hd}+T_{hb}$
		Display	T_{hd}	480			Tc	
		Blank	T_{hb}	50	70	190	Tc	
		Front porch	T_{hfp}	5	-	-	Tc	(6)
		Back porch	T_{hbp}	5	-	-	Tc	
		Hsync	T_{hswid}	2	-	-	Tc	

CONFIDENTIAL

6.1.2 Input Timing SPEC for FHD, Frame Rate = 120Hz

Signal	Item	Symbol	Min.	Typ.	Max.	Unit	Note	
LVDS Clock	2D Mode	F_{clkIn}	60	74.25	79	MHz	(4)	
	3D Mode	(=1/TC)	74.25			MHz		
Frame Rate	2D Mode	F_r	117	120	123	Hz	(5)	
	3D Mode		120			Hz		
Vertical Active Display Term	2D Mode	Total	T_v	1104	1125	1395	Th	$T_v=T_{vd}+T_{vb}$
		Display	T_{vd}	1080			Th	
		Blank	T_{vb}	24	45	315	Th	
		Front porch	T_{vfp}	10	—	—	Th	(6)
		Back porch	T_{vbp}	10	—	—	Th	
		Vsync	T_{vswid}	4	—	—	Th	
	3D Mode	Total	T_v	1125			Th	
		Display	T_{vd}	1080			Th	
		Blank	T_{vb}	45			Th	
		Front porch	T_{vfp}	10	—	—	—	(6)
		Back porch	T_{vbp}	10	—	—	—	
		Vsync	T_{vswid}	4	—	—	—	
Horizontal Active Display Term	2D Mode	Total	T_h	530	550	670	Tc	$T_h=T_{hd}+T_{hb}$
		Display	T_{hd}	480			Tc	
		Blank	T_{hb}	50	70	190	Tc	
		Front porch	T_{hfp}	5	—	—	Tc	(6)
		Back porch	T_{hbp}	5	—	—	Tc	
		Hsync	T_{hswid}	2	—	—	Tc	
	3D Mode	Total	T_h	530	550	670	Tc	$T_h=T_{hd}+T_{hb}$
		Display	T_{hd}	480			Tc	
		Blank	T_{hb}	50	70	190	Tc	
		Front porch	T_{hfp}	5	—	—	Tc	(6)
		Back porch	T_{hbp}	5	—	—	Tc	
		Hsync	T_{hswid}	2	—	—	Tc	

CONFIDENTIAL

6.1.3 Input Timing SPEC for QFHD, Frame Rate = 24Hz


Signal	Item	Symbol	Min.	Typ.	Max.	Unit	Note	
LVDS Clock	Frequency	$F_{clk_{in}}$ (=1/TC)	60	74.25	79	MHz	(4)	
Frame Rate	2D Mode	F_r	23	24	25	Hz	(5)	
Vertical Active Display Term	2D Mode	Total	T_v	2208	2250	2450	Th	$T_v=T_{vd}+T_{vb}$
		Display	T_{vd}	2160			Th	
		Blank	T_{vb}	48	90	290	Th	
		Front porch	T_{vfp}	20	—	—	Th	(6)
		Back porch	T_{vbp}	20	—	—	Th	
		Vsync	T_{vswid}	8	—	—	Th	
Horizontal Active Display Term	2D Mode	Total	T_h	990	1375	1440	Tc	$T_h=T_{hd}+T_{hb}$
		Display	T_{hd}	960			Tc	
		Blank	T_{hb}	30	415	480	Tc	
		Front porch	T_{hfp}	10	—	—	Tc	(6)
		Back porch	T_{hbp}	10	—	—	Tc	
		Hsync	T_{hswid}	4	—	—	Tc	

CONFIDENTIAL

6.1.4 Input Timing SPEC for QFHD, Frame Rate = 30Hz


Signal	Item	Symbol	Min.	Typ.	Max.	Unit	Note	
LVDS Clock	Frequency	$F_{clk_{in}}$ (=1/TC)	60	74.25	79	MHz	(4)	
Frame Rate	2D Mode	F_r	29	30	31	Hz	(5)	
Vertical Active Display Term	2D Mode	Total	T_v	2208	2250	2450	Th	$T_v=T_{vd}+T_{vb}$
		Display	T_{vd}	2160			Th	
		Blank	T_{vb}	48	90	290	Th	
		Front porch	T_{vfp}	20	—	—	Th	(6)
		Back porch	T_{vbp}	20	—	—	Th	
		Vsync	T_{vswid}	8	—	—	Th	
Horizontal Active Display Term	2D Mode	Total	T_h	990	1100	1340	Tc	$T_h=T_{hd}+T_{hb}$
		Display	T_{hd}	960			Tc	
		Blank	T_{hb}	30	140	380	Tc	
		Front porch	T_{hfp}	10	—	—	Tc	(6)
		Back porch	T_{hbp}	10	—	—	Tc	
		Hsync	T_{hswid}	4	—	—	Tc	

Note (1) The input clock cycle-to-cycle jitter is defined as below figures. $Trcl = |T_1 - T_2|$

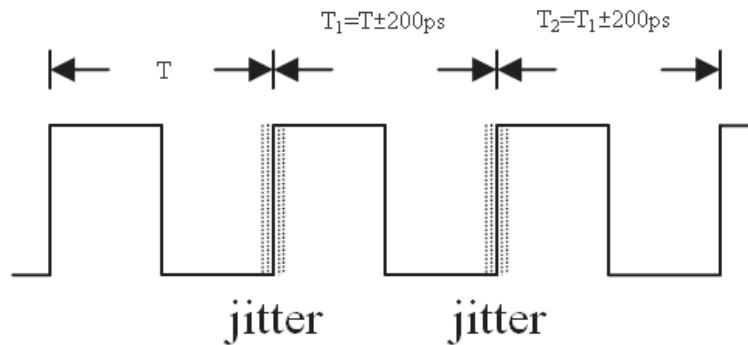


CONFIDENTIAL

Note (2) The SSCG (Spread spectrum clock generator) is defined as below figures.

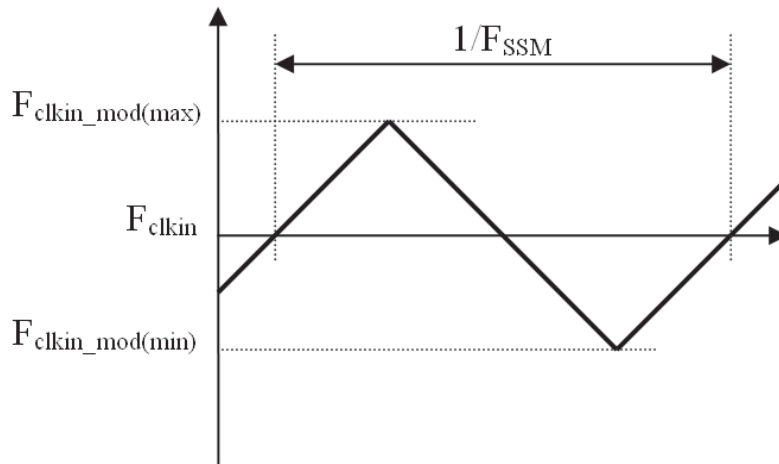

Note (3) The LVDS timing diagram and the receiver skew margin is defined and shown in following figure.

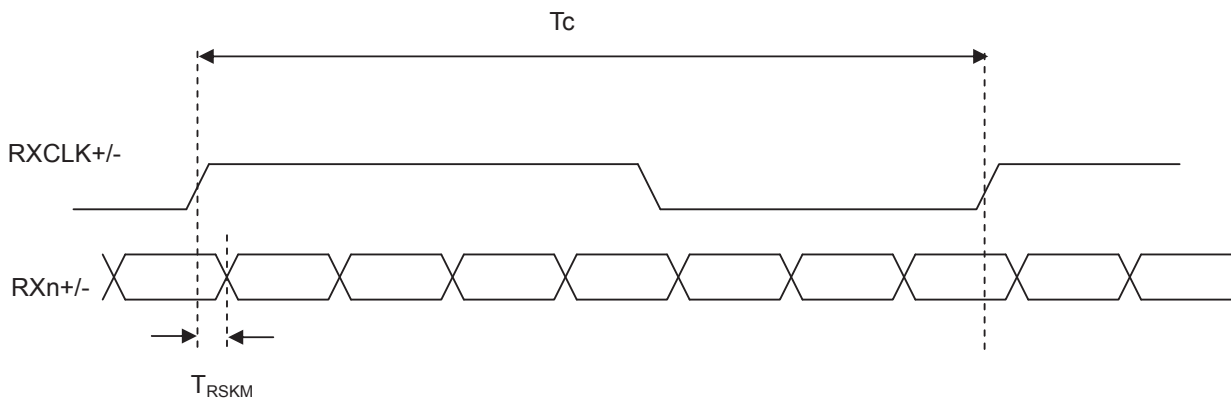


Note (4) Please make sure the range of pixel clock has follow the below equations.

$$F_{clk_in(max)} \geq (F_r \times T_v \times T_h) \geq F_{clk_in(min)}$$

CONFIDENTIAL


Note (5)

- a. The frame-to-frame jitter of the input frame rate is defined as the following figure.
- b. $FR_n = FR_{n-1} \pm 1.8\%$.

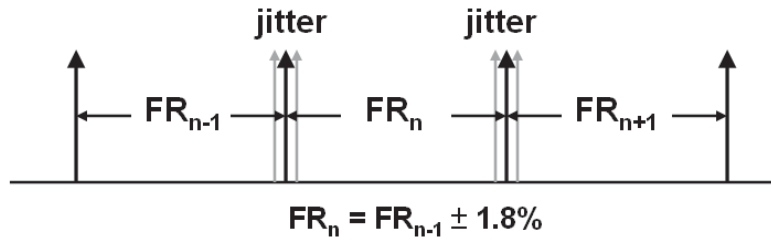

Note (6)

- a. Hsync and Vsync signals are necessary for this module.
- b. The polarity of Hsync & Vsync should be positive.
- c. Please follow the input signal timing diagram as below :

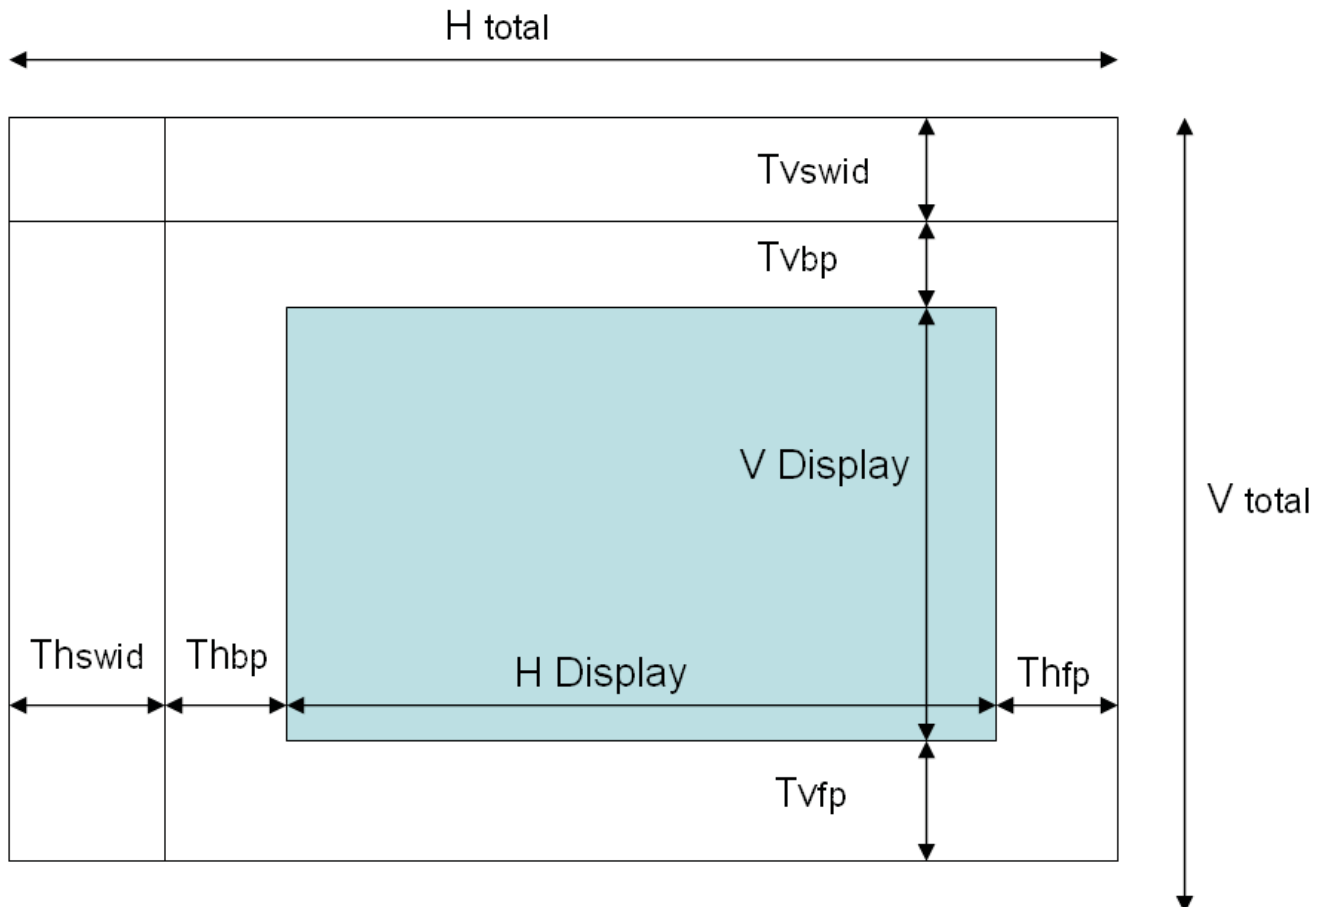

$H \text{ blank} = H \text{ total} - H \text{ Display}$



$V \text{ blank} = V \text{ total} - V \text{ Display}$

CONFIDENTIAL

6.2 POWER ON/OFF SEQUENCE

(Ta = 25 ± 2 °C)

To prevent a latch-up or DC operation of LCD module, the power on/off sequence should be as the diagram below.

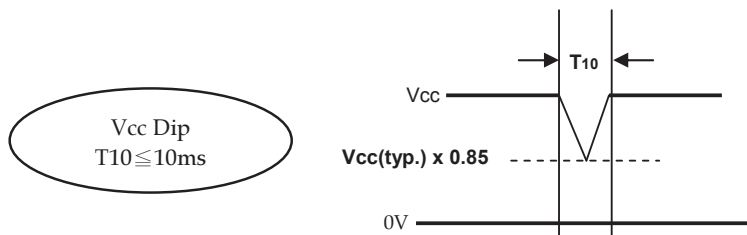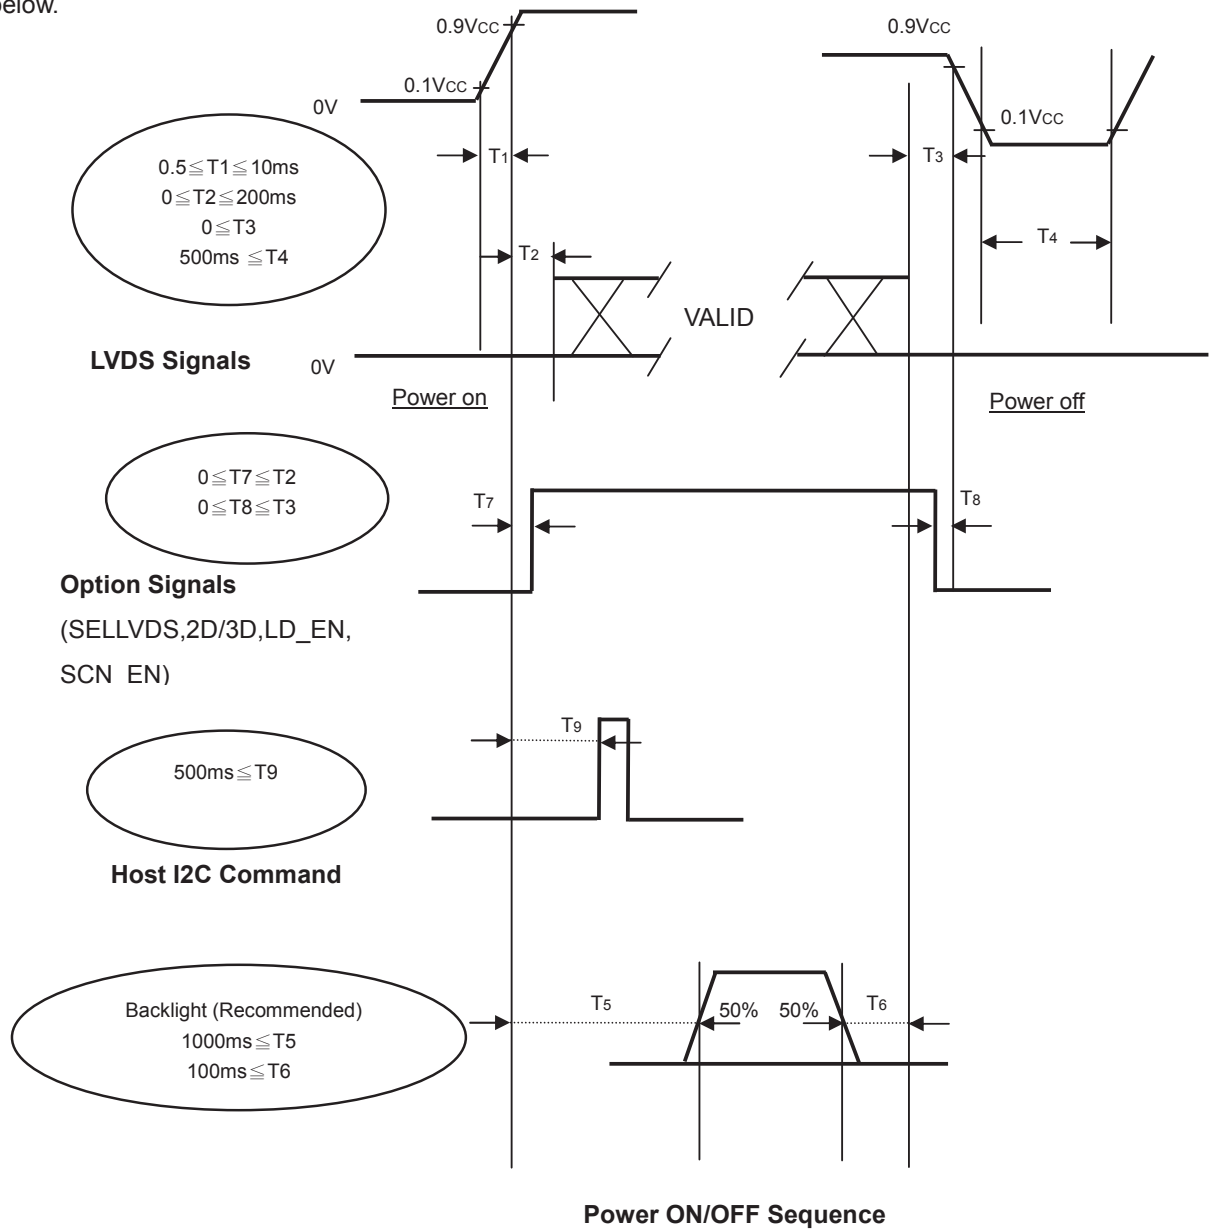

CONFIDENTIAL

Note (1) The supply voltage of external system for the module input should follow the definition of Vcc.

Note (2) Apply the lamp voltage within the LCD operation range. When the backlight turns on before the LCD operation or the LCD turns off before the backlight turns off, the display may momentarily become abnormal screen.

Note (3) In case of VCC=off, please keep the level of input signals on the low or high impedance.

Note (4) T4 should be measured after the module has been fully discharged between power off and on period.

Note (5) Interface signal shall not be kept at high impedance when the power is on.

Note (6) Vcc must decay smoothly when power-off.

CONFIDENTIAL

7. OPTICAL CHARACTERISTICS

7.1 TEST CONDITIONS

Item	Symbol	Value	Unit
Ambient Temperature	Ta	25±2	
Ambient Humidity	Ha	50±10	%RH
Supply Voltage	V _{CC}	12±1.2	V
Input Signal	According to typical value in "3. ELECTRICAL CHARACTERISTICS"		
LED Current	I _L	120±3.6	mA

Local Dimming Function should be Disable before testing to get the steady optical characteristics

CONFIDENTIAL

7.2 OPTICAL SPECIFICATIONS


The relative measurement methods of optical characteristics are shown in 7.2. The following items should be measured under the test conditions described in 7.1 and stable environment shown in 7.1.

Item	Symbol	Condition	Min.	Typ.	Max.	Unit	Note				
Contrast Ratio	CR		3500	5000	-	-	(2)				
Response Time (VA)	Gray to gray (for 120Hz)	$\theta_x=0^\circ, \theta_y=0^\circ$ Viewing angle at normal direction	-	6.5	13	ms	(3)				
	Gray to gray (for 60Hz)			8.5	18	ms	(3)				
Center Luminance of White	L _c		2D	320	400	-	cd/m ²	(4)			
			3D	-	60	-	cd/m ²	(8)			
White Variation	δW			-	-	1.3	-	(6)			
Cross Talk	CT		2D	-	-	4	%	(5)			
			3D-W	-	4	-	%	(8)			
			3D-D	-	11	-	%	(8)			
Color Chromaticity	Red		R _x	Typ. -0.03	0.640	Typ. +0.03	-	-			
			R _y		0.332		-				
	Green	G _x	0.307		-						
		G _y	0.605		-						
	Blue	B _x	0.148		-						
		B _y	0.060		-						
	White	W _x	0.280		-						
		W _y	0.290		-						
	Correlated color temperature				-		10000		-	K	-
	Color Gamut	C.G.			-		72		-	%	NTSC
Viewing Angle	Horizontal	θ_{x+}	CR \geq 20 (VA)	80	88	-	Deg.	(1)			
		θ_{x-}		80	88	-					
	Vertical	θ_{y+}		80	88	-					
		θ_{y-}		80	88	-					
Transmission direction of the up polarizer	Φ_{up-P}	-	-	90	-	Deg.	(7)				

CONFIDENTIAL

Note (1) Definition of Viewing Angle (θ_x, θ_y) :

Viewing angles are measured by Autronic Conoscope Cono-80

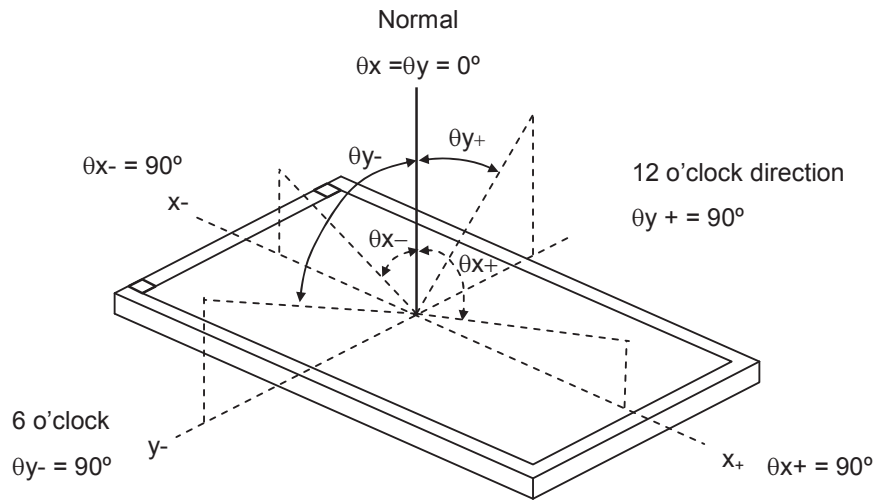

Note (2) Definition of Contrast Ratio (CR) :

The contrast ratio can be calculated by the following expression.


$$\text{Contrast Ratio (CR)} = \frac{\text{Surface Luminance of L255}}{\text{Surface Luminance of L0}}$$

L255: Luminance of gray level 255

L 0: Luminance of gray level 0

CR = CR (5), where CR (X) is corresponding to the Contrast Ratio of the point X at the figure in Note (6).

Note (3) Definition of Response Time (TR, TF):

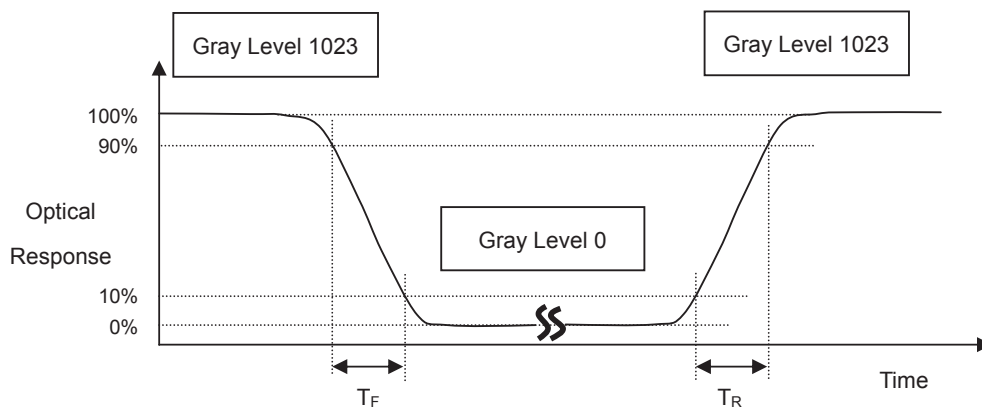

The driving signal means the signal of gray level 0, 124, 252, 380, 508, 636, 764, 892 and 1023.

Gray to gray average time means the average switching time of gray level 0, 124, 252, 380, 508, 636, 764, 892 and 1023 to each other.

CONFIDENTIAL

Note (4) Definition of Luminance of White (L_C):

Measure the luminance of gray level 255 at center point and 5 points

$L_C = L(5)$, where $L(X)$ is corresponding to the luminance of the point X at the figure in Note (6).


Note (5) Definition of Cross Talk (CT):

$$CT = |Y_B - Y_A| / Y_A \times 100 (\%)$$

Where:

Y_A = Luminance of measured location without gray level 255 pattern (cd/m²)

Y_B = Luminance of measured location with gray level 255 pattern (cd/m²)

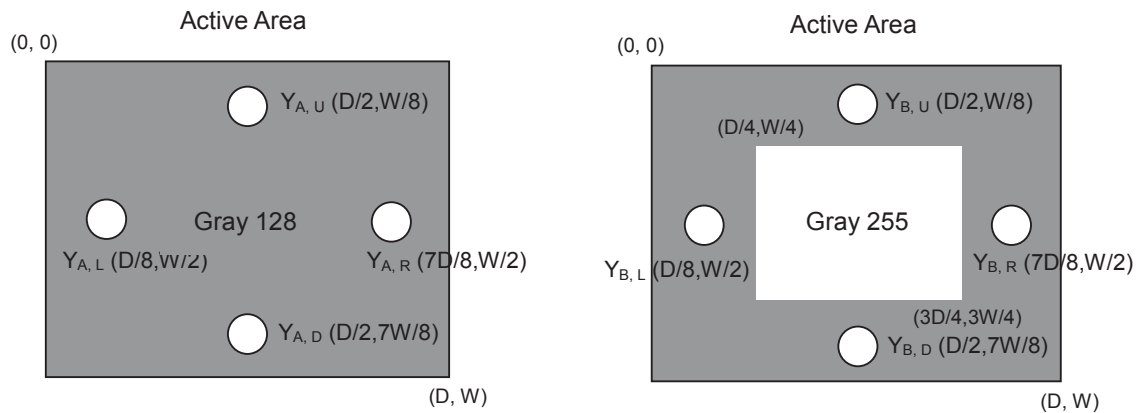


CONFIDENTIAL

Note (6) Definition of White Variation (δW):

Measure the luminance of gray level 255 at 5 points


$$\delta W = \text{Maximum} [L(1), L(2), L(3), L(4), L(5)] / \text{Minimum} [L(1), L(2), L(3), L(4), L(5)]$$

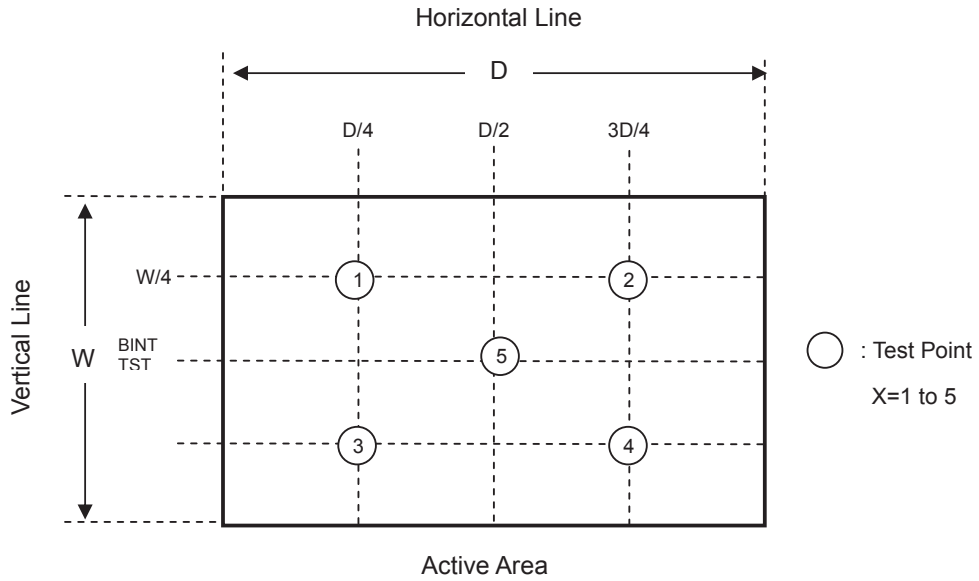



CONFIDENTIAL

Note (7) This is a reference for designing the shutter glasses of 3D application.

Definition of the transmission direction of the up polarizer(Φ_{up-P}) on LCD Module:

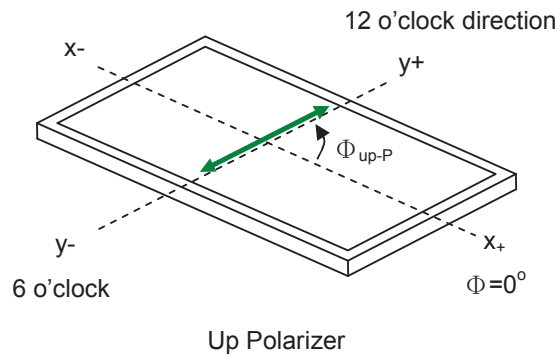

The transmission axis of the front polarizer of the shutter glasses should be parallel to this panel transmission direction to get a maximum 3D mode luminance.

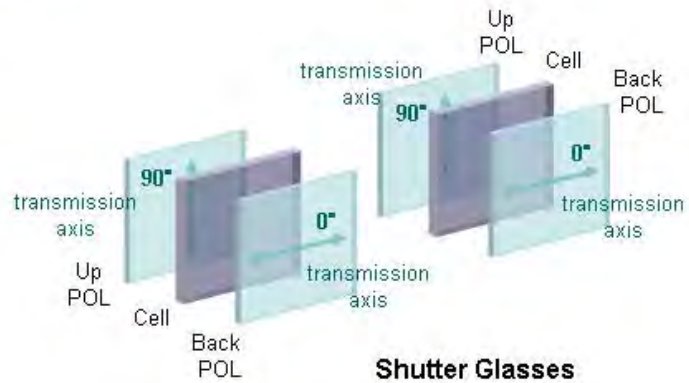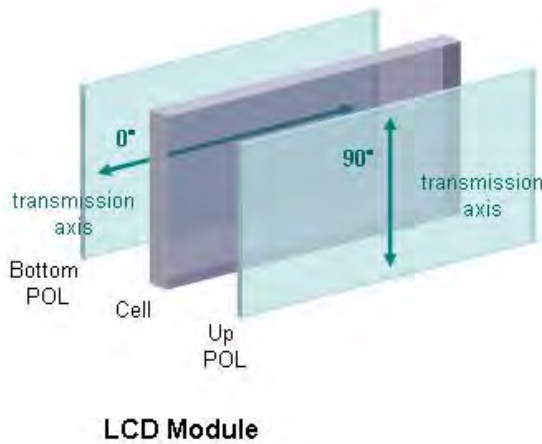


CONFIDENTIAL


Note (8) Definition of the 3D mode performance (measured under 3D mode, use CMI's shutter glass):

a. Test pattern

Left eye image and right eye image are displayed alternated

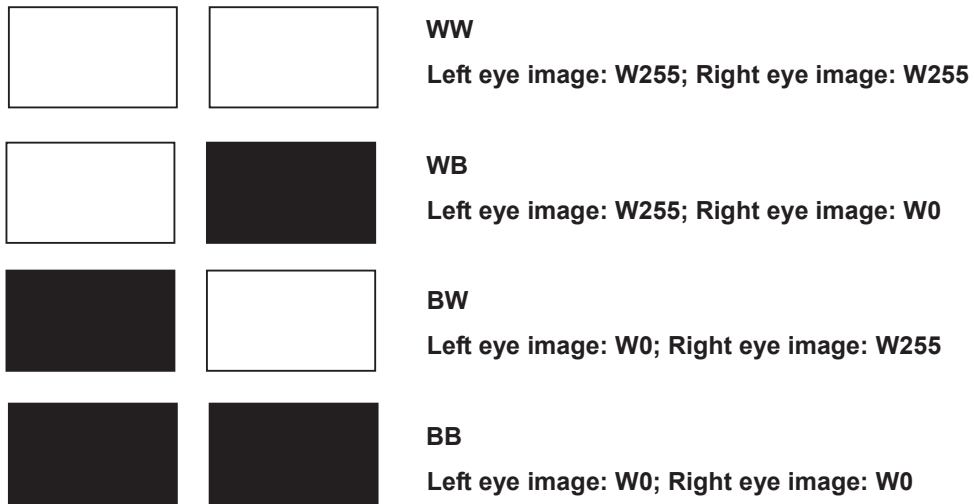

b. Measurement setup

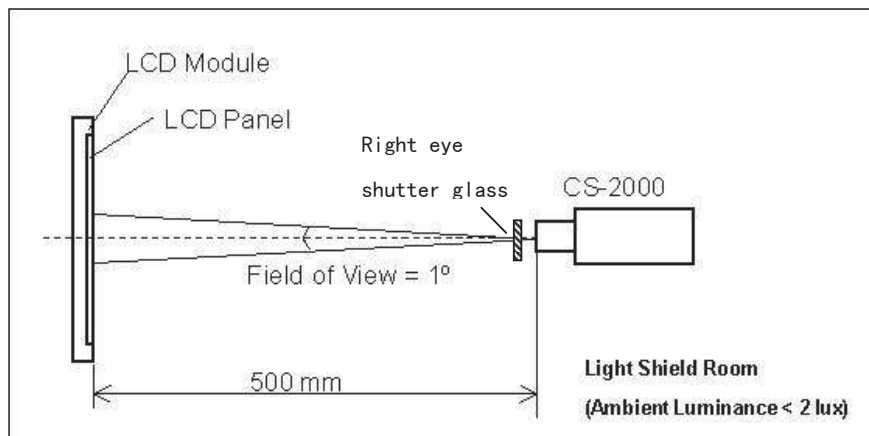

Shutter glasses are well controlled under suitable timing, and measure the luminance of the center point of the panel through the right eye glass. The transmittance of the glass should be larger than 40.0% under 3D mode operation.

The luminance of the test pattern "WW", denoted L(WW); the luminance of the test pattern "WB", denoted L(WB); the luminance of the test pattern "BW", denoted L(BW); the luminance of the test pattern "BB", denoted L(BB)

c. Definition of the Center Luminance of White, Lc (3D) : L(WW)

d. Definition of the 3D mode white crosstalk, CT (3D-W) : $CT(3D \ W) \equiv \frac{L(WB) \ L(BB)}{L(WW) \ L(BB)}$

Definition of the 3D mode dark crosstalk, CT (3D-D) : $CT(3D \ D) \equiv \frac{L(WW) \ L(BW)}{L(WW) \ L(BB)}$

CONFIDENTIAL

8. PRECAUTIONS

8.1 ASSEMBLY AND HANDLING PRECAUTIONS

- [1] Do not apply rough force such as bending or twisting to the module during assembly.
- [2] It is recommended to assemble or to install a module into the user's system in clean working areas. The dust and oil may cause electrical short or worsen the polarizer.
- [3] Do not apply pressure or impulse to the module to prevent the damage of LCD panel and Backlight.
- [4] Always follow the correct power-on sequence when the LCD module is turned on. This can prevent the damage and latch-up of the CMIS LSI chips.
- [5] Do not plug in or pull out the I/F connector while the module is in operation.
- [6] Do not disassemble the module.
- [7] Use a soft dry cloth without chemicals for cleaning, because the surface of polarizer is very soft and easily scratched.
- [8] Moisture can easily penetrate into LCD module and may cause the damage during operation.
- [9] When storing modules as spares for a long time, the following precaution is necessary.
 - [9.1] Do not leave the module in high temperature, and high humidity for a long time. It is highly recommended to store the module with temperature from 0 to 35°C at normal humidity without condensation.
 - [9.2] The module shall be stored in dark place. Do not store the TFT-LCD module in direct sunlight or fluorescent light.
- [10] When ambient temperature is lower than 10°C, the display quality might be reduced. For example, the response time will become slow, and the starting voltage of CCFL will be higher than that of room temperature.

8.2 SAFETY PRECAUTIONS

- [1] The startup voltage of a Backlight is approximately 1000 Volts. It may cause an electrical shock while assembling with the inverter. Do not disassemble the module or insert anything into the Backlight unit.
- [2] If the liquid crystal material leaks from the panel, it should be kept away from the eyes or mouth. In case of contact with hands, skin or clothes, it has to be washed away thoroughly with soap.
- [3] After the module's end of life, it is not harmful in case of normal operation and storage.

CONFIDENTIAL

8.3 SAFETY STANDARDS

The LCD module should be certified with safety regulations as follows:

Regulatory	Item	Standard
Information Technology equipment	UL	UL60950-1:2006 or Ed.2:2007
	cUL	CAN/CSA C22.2 No.60950-1-03 or 60950-1-07
	CB	IEC60950-1:2005 / EN60950-1:2006+ A11:2009
Audio/Video Apparatus	UL	UL60065 Ed.7:2007
	cUL	CAN/CSA C22.2 No.60065-03:2006 + A1:2006
	CB	IEC60065:2001+ A1:2005 / EN60065:2002 + A1:2006+ A11:2008


If the module displays the same pattern for a long period of time, the phenomenon of image sticking may be occurred.

CONFIDENTIAL

9. DEFINITION OF LABELS

9.1 CMI MODULE LABEL


The barcode nameplate is pasted on each module as illustration, and its definitions are as following explanation.

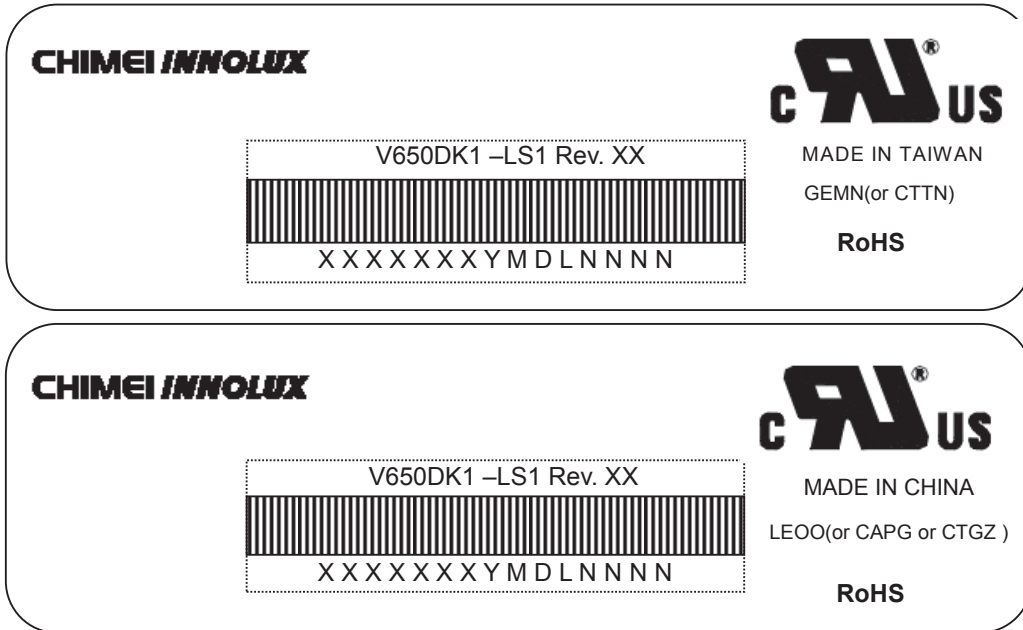

Model Name: V650DK1 -LS1

Revision: Rev. XX, for example: A0, A1 B1, B2 or C1, C2 etc.

Serial ID: XXXXXXYMDLNNNN

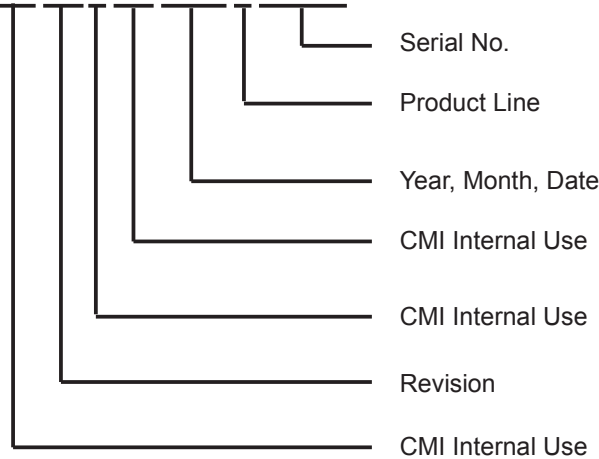

Serial ID includes the information as below:

Manufactured Date:

Year : 2001=1, 2002=2, 2003=3, 2004=4 2010=0, 2011=1, 2012=2

Month: 1~9, A~C, for Jan. ~ Dec.

Day: 1~9, A~Y, for 1st to 31st, exclude I ,O, and U.

Revision Code : Cover all the change

Serial No. : Manufacturing sequence of product

Product Line : 1 → Line1, 2 → Line 2, etc.

CONFIDENTIAL

10. PACKAGING

10.1 PACKAGING SPECIFICATIONS

- (1) 2 lcd TV modules / 1 box
- (2) Box dimensions : 1645(L)x282(W)x982(H)mm
- (3) Weight : approx. 60 Kg(2 modules per carton)

10.2 PACKAGING METHOD

Figures 10-1 and 10-2 are the packing method

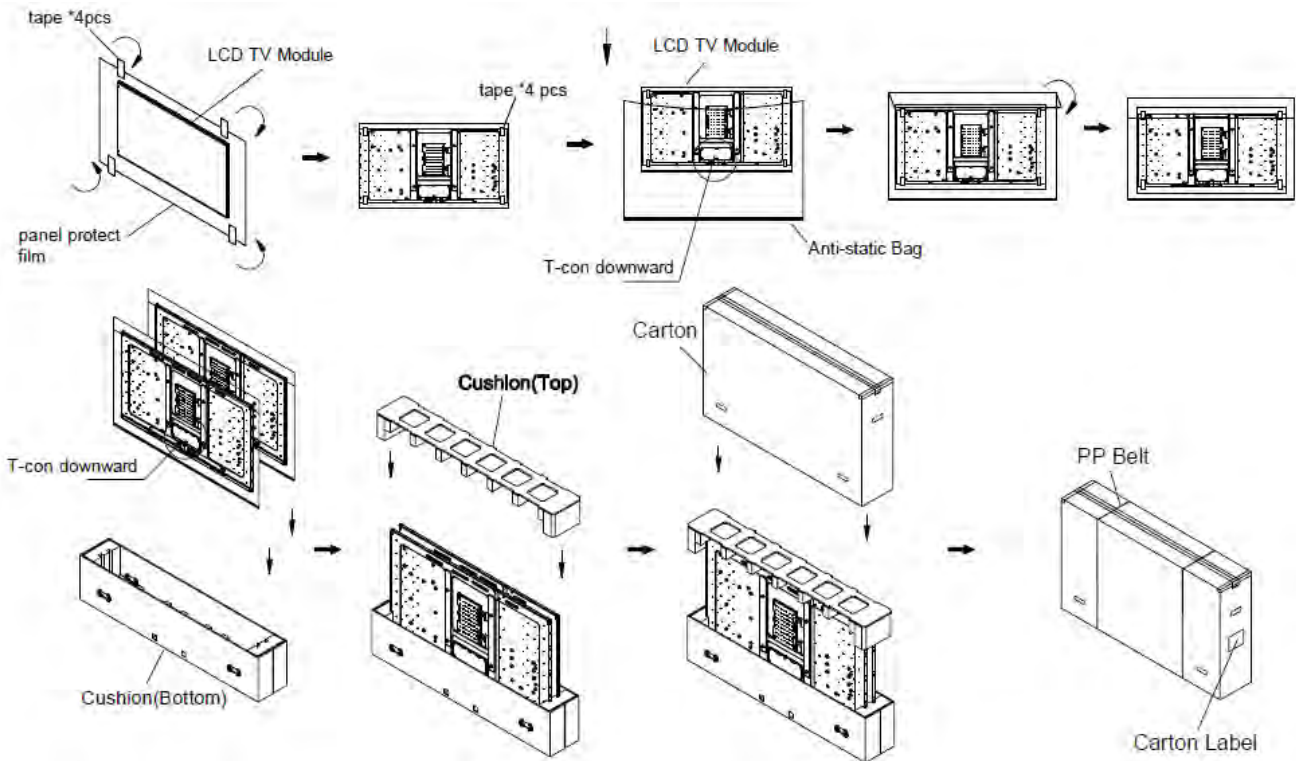


Figure 10 1 packing method

CONFIDENTIAL

Sea / Land Transportation (40ft & 40ft HQ Container)

Air Transportation


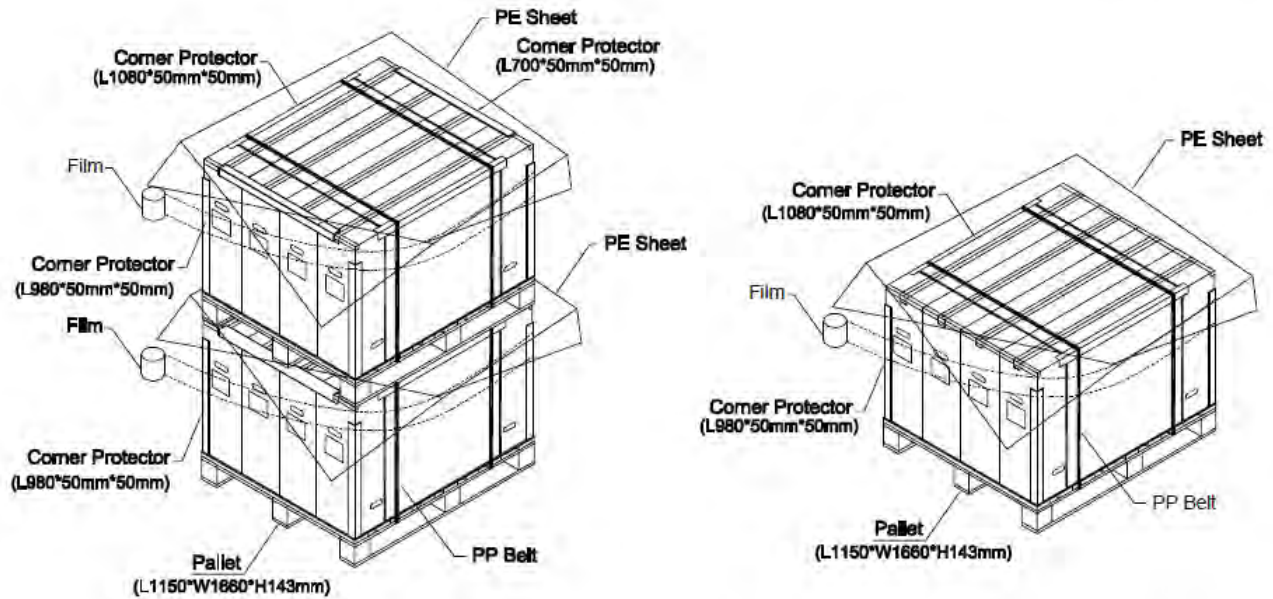


Figure 10 2 packing method


CONFIDENTIAL

11. MECHANICAL CHARACTERISTIC


CONFIDENTIAL

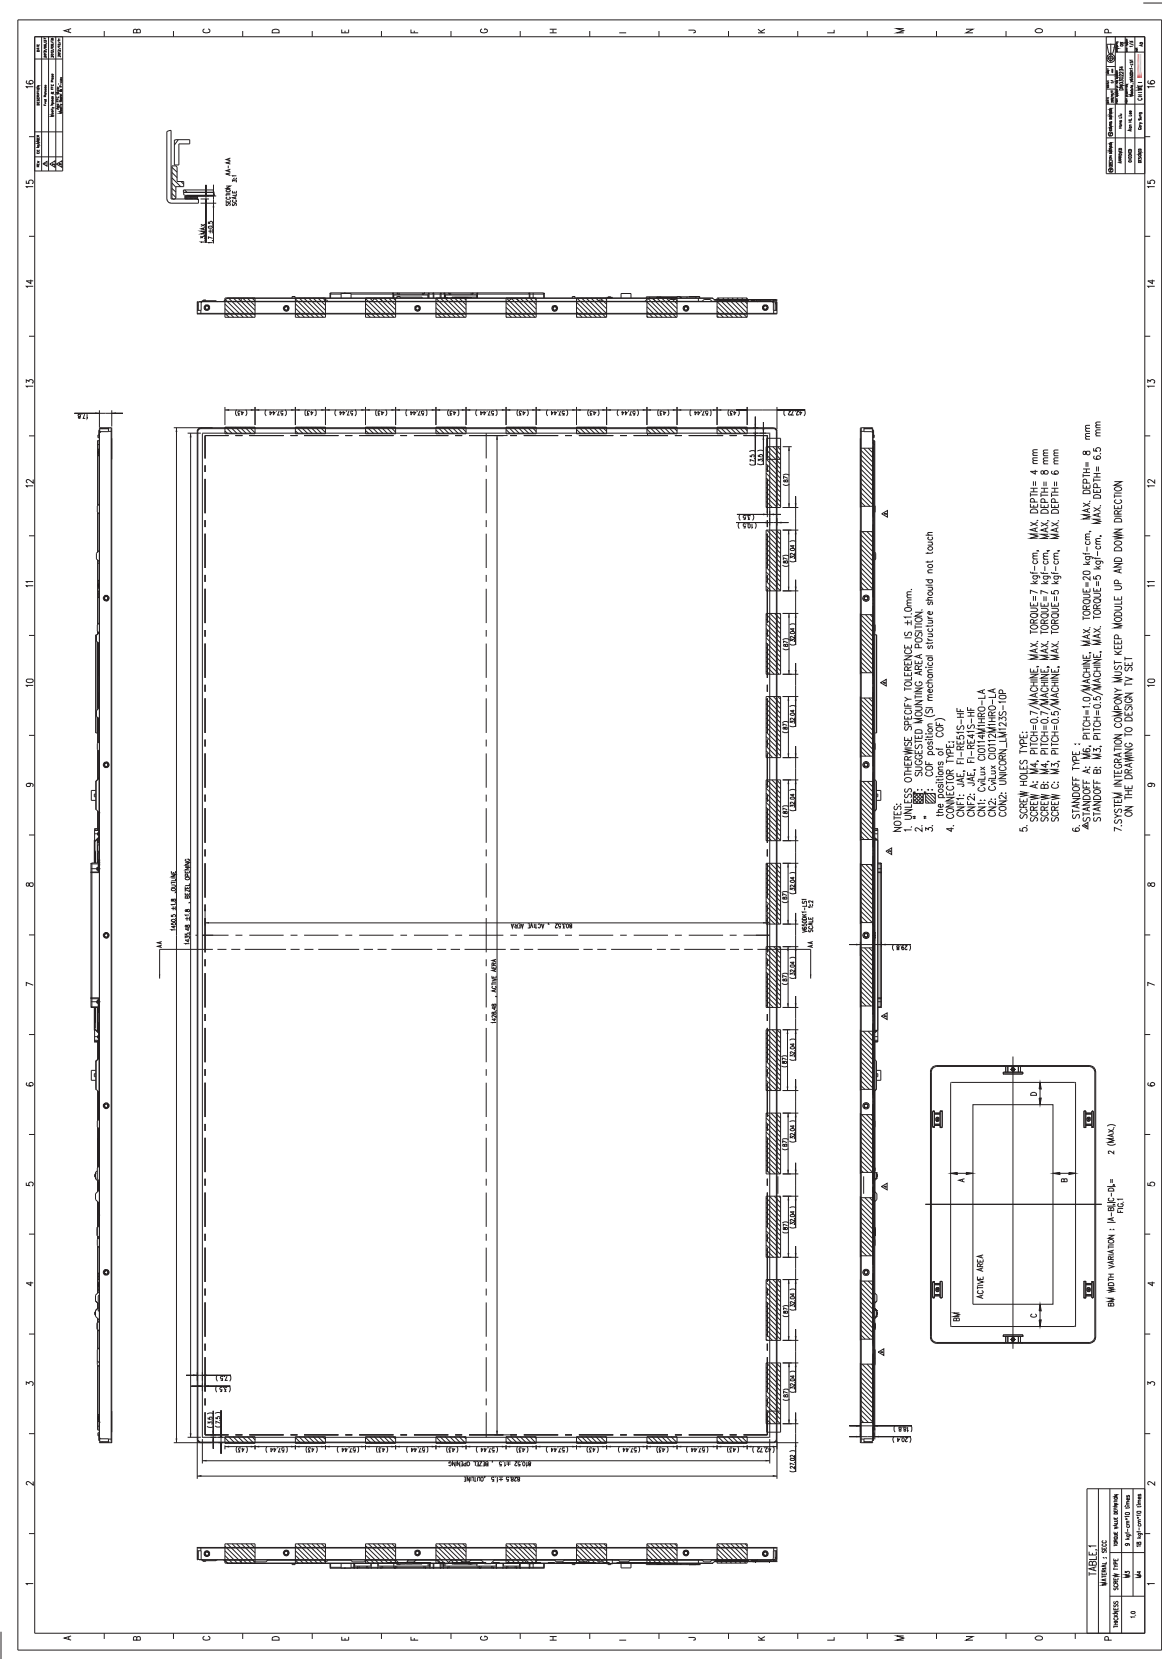

CONFIDENTIAL

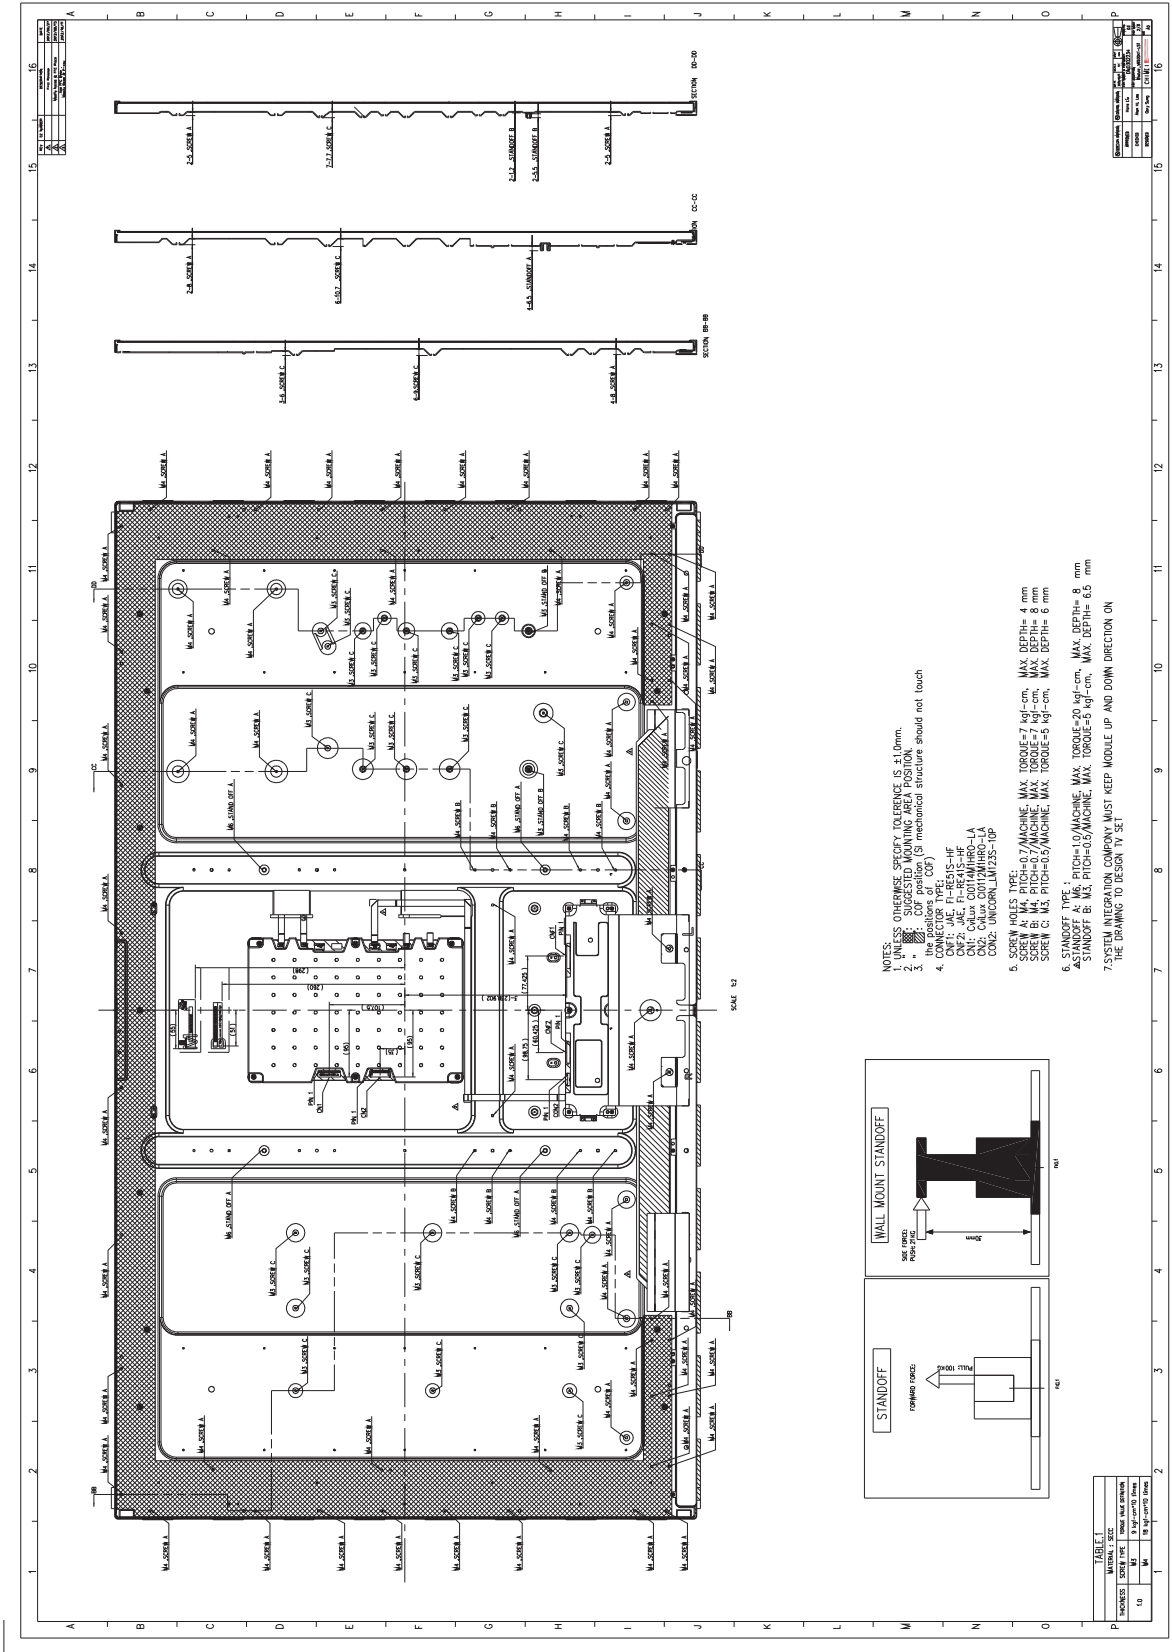


- NOTES:
- UNLESS OTHERWISE SPECIFY, TOLERANCE IS ±1.0mm.
 - : SUGGESTED MOUNTING AREA POSITION.
 - : In Position (CP).
 - CONNECTOR TYPE:
 ON: CULX C014MHR-LA
 ONF: JAE, F-REAS-1F
 ONC: UNICORN LML235-TIP
 - SCREEN HOLES TYPE:
 SCORE A: MAX PITCH=0.7/MACHINE, MAX TORQUE=7 kgf-cm, MAX DEPTH= 4 mm
 SCORE B: MAX PITCH=0.7/MACHINE, MAX TORQUE=7 kgf-cm, MAX DEPTH= 8 mm
 SCORE C: MAX PITCH=0.5/MACHINE, MAX TORQUE=5 kgf-cm, MAX DEPTH= 6 mm
 - STANDOFF TYPE:
 STANDOFF A: MAX PITCH=1.0/MACHINE, MAX TORQUE=20 kgf-cm, MAX DEPTH= 8 mm
 STANDOFF B: MAX PITCH=0.5/MACHINE, MAX TORQUE=5 kgf-cm, MAX DEPTH= 6.5 mm
 - SYSTEM INTEGRATION COMPANY MUST KEEP MODULE UP AND DOWN DIRECTION ON THE DRAWING TO DESIGN TV SET.

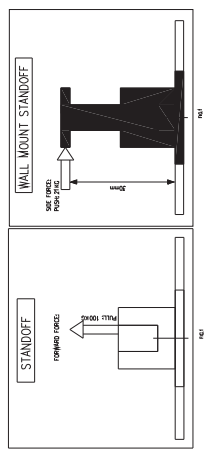

NO.	REVISION	DATE	BY	CHKD BY	ENG. NAME
1.0					
1.1					
1.2					
1.3					
1.4					
1.5					
1.6					
1.7					
1.8					
1.9					
2.0					

CONFIDENTIAL

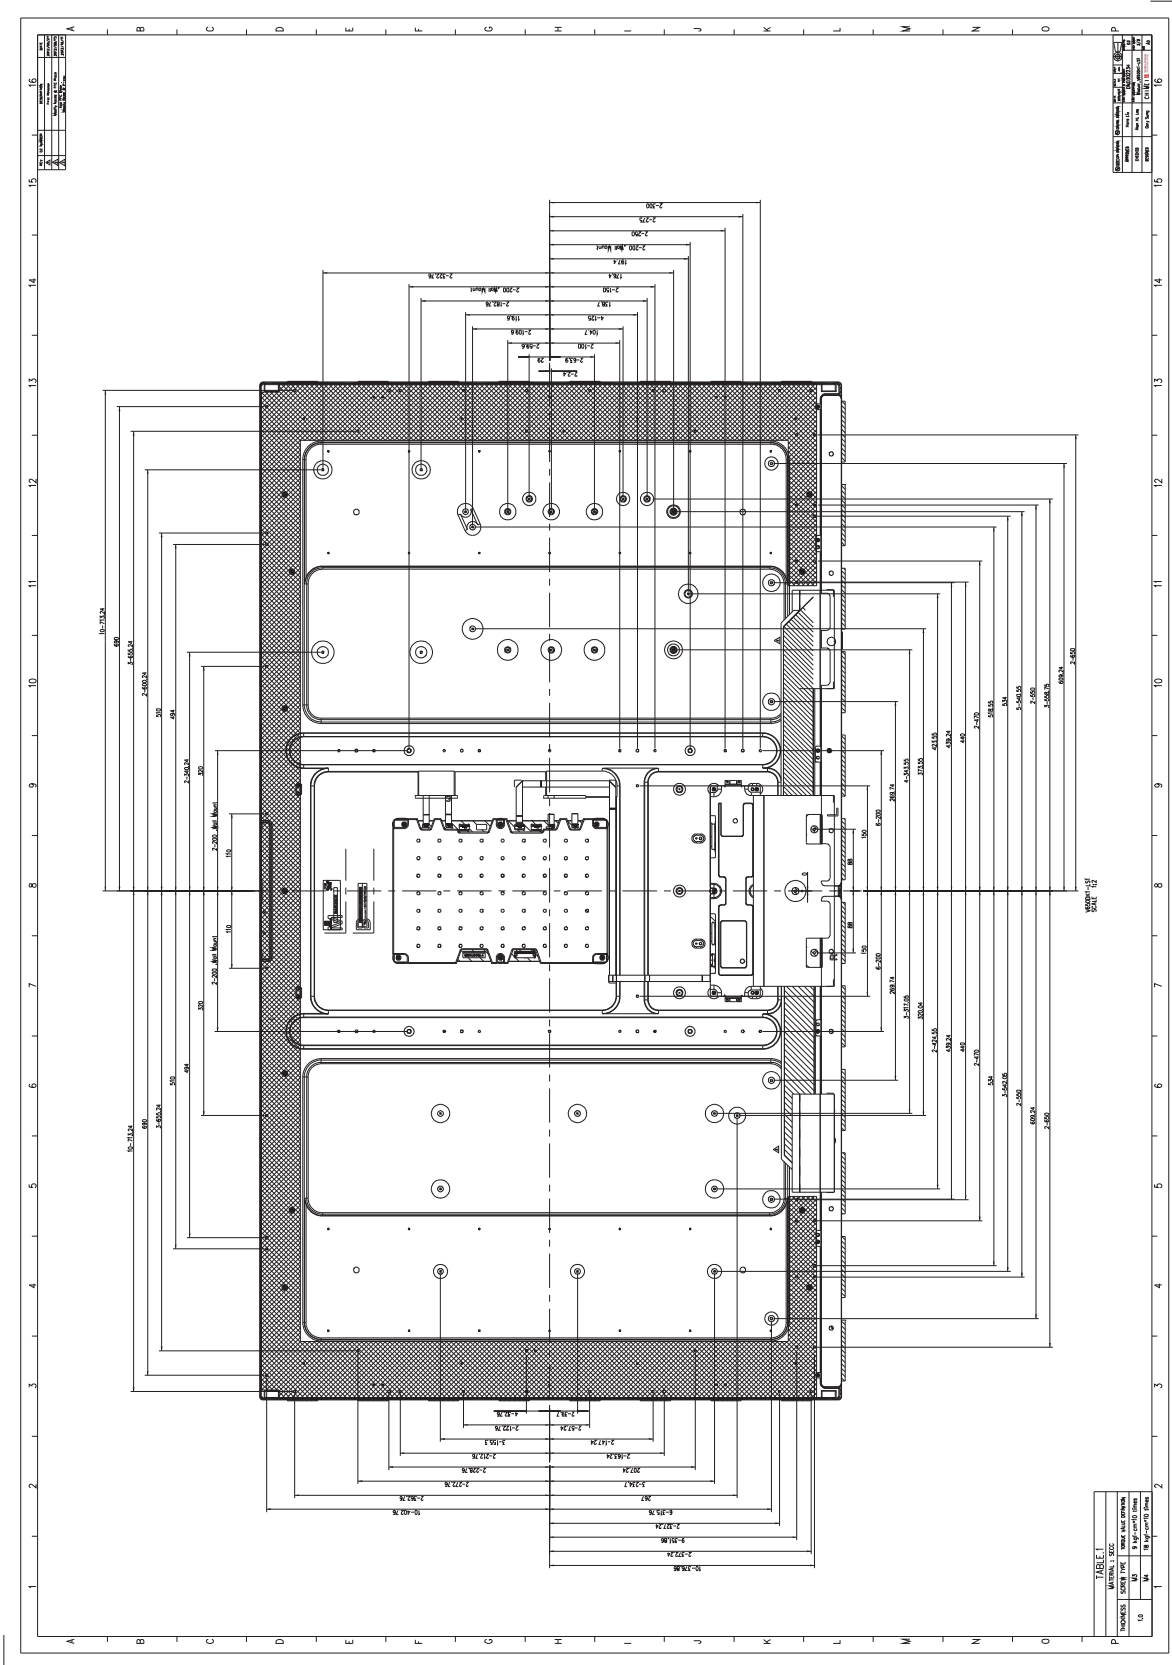



Displays

US Micro Products is an industrial distributor specializing in engineered display solutions. We dedicate ourselves to providing the best in displays for the medical, industrial, gaming, automotive, aerospace, military and consumer markets.

OLEDs



TFT Display



Open Frame Monitors



Passive LCDs



Multitouch



Touch Screen



As our customer, you receive expert knowledge, support and service. Our technical sales staff and experienced design engineers provide answers to your questions and engineered solutions to meet your display needs.

Peripheral Devices

Our full line of peripheral devices includes keyboards, trackballs and printers. These rugged industrial products are designed to meet the rigorous demands of your equipment and are available in a variety of standard and custom options.

Keyboards



Trackballs



Aerospace Trackballs



Printers

