

# 15" OPEN FRAME MONITOR SPECIFICATION

Part Number	USMP-F150-102076RBZ-A0
Size	15"
Resolution	1024 x 768
Brightness	300 cd/m <sup>2</sup>
Contrast	1500:1
Viewing Angle	89/89/89/89
Operating Temp.	-10° ~ 70°C

FOR ADDITIONAL INFORMATION  
PLEASE CONTACT:  
[engineering@usmicroproducts.com](mailto:engineering@usmicroproducts.com)

Issue Date	Approved by (customer use)	Checked by	Prepared by

PROPRIETARY NOTE: THIS SPECIFICATION IS THE PROPERTY OF US MICRO PRODUCTS AND SHALL NOT BE REPRODUCED OR COPIED WITHOUT THE WRITTEN PERMISSION OF US MICRO PRODUCTS AND MUST BE RETURNED TO US MICRO PRODUCTS UPON ITS REQUEST.


**(800) 741-7755**  
[www.usmicroproducts.com](http://www.usmicroproducts.com)

# 15" Open Frame Monitor with Touch

## Specifications

Model Name	USMP-F150-102076RBZ-A0
Screen Size	15"
Active Display Area (mm)	304.128 (H) x 228.096 (V)
Pixel Pitch (mm)	0.297 (H) x 0.297 (V)
Display Mode	Normally Black
Display Resolution (pixel)	1024 x 768
Contrast Ratio	1500:1
Display Color	16.2M/262K
Brightness (CD/m <sup>2</sup> )	300
Backlight	LED
Viewing Angles (CR = 10)	178 (H); 178 (V)
Response Time(Typ.Tr+Tf)	35ms
Signal Connector	VGA/DVI/Audio
Input Voltage	AC 110V~220
Dimension(VxHxT)	332 x 259 x 44.3
Operating Temperature	-10° ~ 70°C
Storage Temperature	-30° ~ 70°C
Relative Humidity	5(%RH)~90(%RH)
Bezel Color	Pantone 428
Amplified Speakers	2 Watts x 2 pcs
Certifications	UL (60950),FCC,CE A
LCD Level	Grade
Touch Panel	Resistive
Haze	9.5% +/- 2
Light Transition	80% +/- 2
Hardness	≥ 3H
Operating Force	≤ 50g Stylus=R0.8
Knock Test(times)	35000000

## Mechanical Drawing

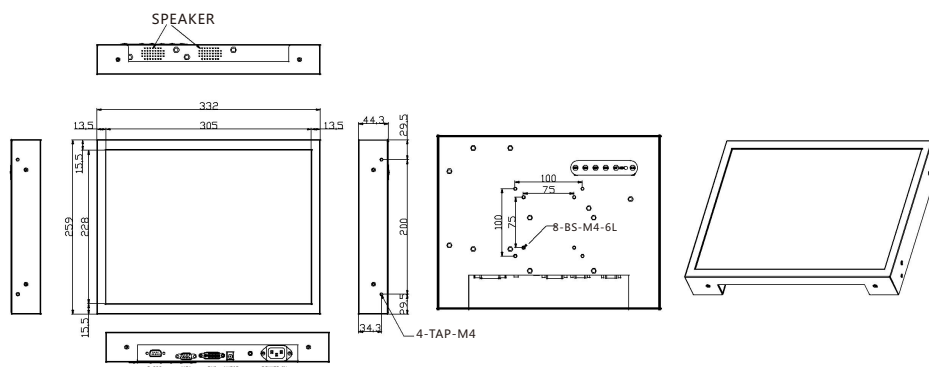

## Order Information

Model Name	Description
USMP-F150-102076RBZ-A0	IP with 15"LCD,300cd/m <sup>2</sup> 1024x768 Pixels,LED Backlight; VGADVI/Audio,Resistive touchscreen(5-wire);

